



AIR TOOLS

PROFESSIONAL PNEUMATIC TOOLS

www.scorpiotool.com.tw

YUEH CHI ENTERPRISE CO., LTD.



Why Scorpio?

Scorpio Tool has over 30 years of experience in pneumatic tool manufacturing. We are committed to developing high-quality and stable products for the market. Our products are rigorously tested from design to production, and we use the most advanced manufacturing techniques and quality control procedures to ensure that our customers receive the best possible products. We are confident that our continuous innovation will allow us to provide the best possible customer experience for all of our products.





QUALITY
SERVICE
INNOVATION



YUEH-CHI ENTERPRISE CO., LTD.

BEST PRODUCT · BEST QUALITY · BEST SERVICE

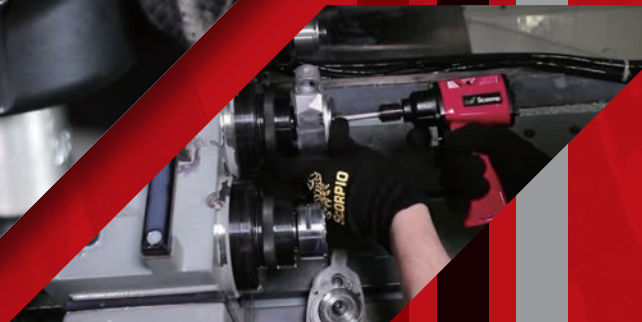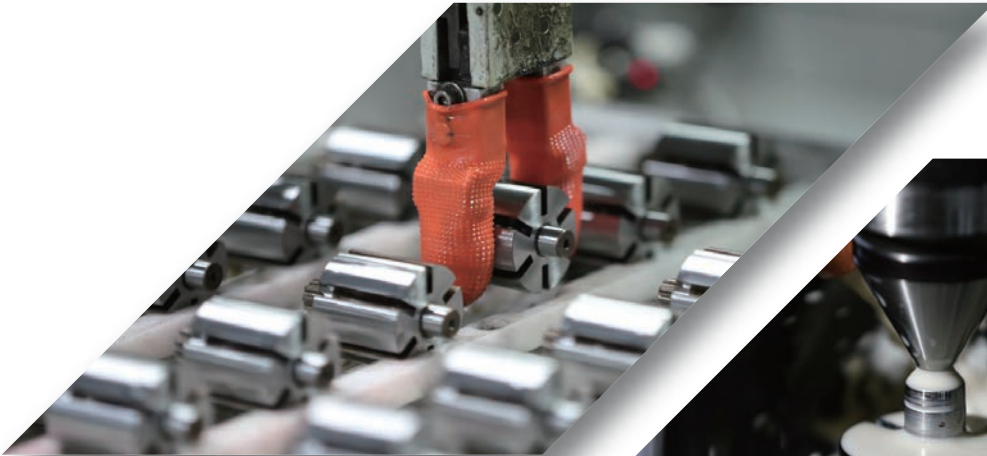


www.scorpiotool.com.tw

contents

1	Why Scorpio
3	Impact Mechanism
4	Composite Impact Wrench Patented Technology
5	Composite Impact Wrench "DAI" Series
8	Aluminum Impact Wrench "DAI" Series
8	Industrial Impact Wrench "DAI" Series
9	Palm Impact Wrench "DAI" Series
10	Flexible Angle Impact Wrench "DAI" Series
12	Low Air Consumption Series
13	Composite Impact Wrench- Low Air Consumption Series
16	Composite Impact Wrench-Utmost Torque Series
20	Aluminum Impact Wrench
26	Air Ratchet Wrench
27	Air Screw Driver
29	Air Adjustable Clutch Screw Driver/Air Auto Shut-Off Clutch Screw Driver
30	Air Drill
31	0.3/0.9HP Family-Looking Air Tools - Grinder & Sander
32	0.5HP Low Noise Family-Looking Air Tools
35	Air Cutting Tools
36	Air Screw Driver
38	Air Grinder, Sander & Polisher
39	Oil-Free Random Orbital Sander
40	Air Sander
41	Air Grinder & Sander & Polisher
42	Mini Needle Scale
43	Air Needle Scaler / Flux Chipperr
44	Air Hammer
45	Air Chipping Hammer
46	Air Concrete Breaker
47	Air Hydraulic Rivet Nut Tools / Air Rivet Nut Tools
48	Air Hydraulic Riveter
50	Air Spray Gun
51	Air Blow Gun
52	Air Grease Gun / Air Gaulking Gun
53	Air Inflator
54	Dr. Impact Extension Bar / Air Insulated Torque Wrench
55	Torque Wrench
56	Air Accessories - Spring Balancer / Air Accessories - F.R.L. Combination
57	Air Accessories - Coupler & Hose & Others
58	Air Impact Sockets
59	Torque Tester
60	Air Compressor Hook-up
61	Periodic Maintenance and Inspection

New improvement Hammer cam protects spring against damage from hammer pin.

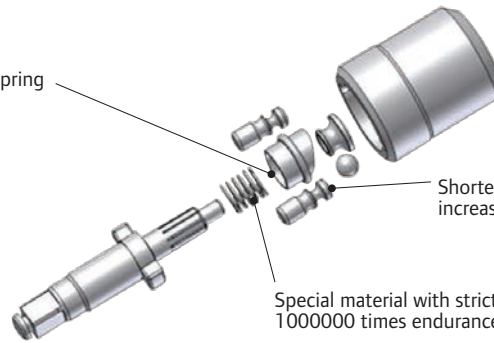

Shorter and special design of hammer pin increased tools lifetime.

Special material with strict quality control of spring with 1000000 times endurance test, safety and durability!

Smooth balance impact for operation.

● Pin Clutch Hammer Mechanism



Mechanism :

- Smooth balance impact for operation.
- Provided with high torque and durability.
- Low vibration and noise.
- Smooth bolt starting, excellent for use in industry assembly line applications.

Usable for Products on Impact Clutch :

1/2", 3/4"

● Pin Less Hammer Mechanism



Mechanism :

- Closet hammer cage mechanism prevents breakage from hammer pin damage.
- Special extension design of hammer cam provides smooth balance impact, low vibration level and high torque level.
- Undivided hammer pin and hammer dog mechanism prevent damage of hammer pin, increased tools lifetime.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1"

● Twin Hammer Hammer Mechanism




Mechanism :

- Two identical hammers provided with instantaneous balance blow and highest torque for blow starting.
- Durable hammer design and excellent for use in heavy-duty industrial applications.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1/4", 3/8", 1/2", 3/4", 1"

● Jumbo Hammer Hammer Mechanism



Mechanism :

- At same level tools, jumbo structure is the simplest mechanism that produce a huge torque output, but with a higher vibration.

Usable for Products on Impact Clutch:

3/8", 1/2"

● Double Hammer Hammer Mechanism



Mechanism :

- Double hammer operates by hitting both side at the same time, it is efficient to work in small pneumatic tools.
- Smooth balance impact and low reaction force
- High efficiency work in small pneumatic tools

Usable for Products. 1/4", 3/8" Impact wrench and Screw driver.

● Rocking Dog Hammer Mechanism



Mechanism :

- Simple design hammer mechanism provided great hitting power, easy maintenance.
- Simple design recommended for medium duty industrial applications.

Usable for Products on Impact Clutch :


3/8", 3/4", 1"

Revolutionary 1/2" Composite Impact Wrench Patented "Double Air Intake" YU-12891T



Super Compact & Light Weight


Compare to regular impacts—
Whole Volume reduces 35%
Total Weight reduces 20%.



**Above models in 1/2" anvil, approx. 1000Nm working torque.



Patented Technology

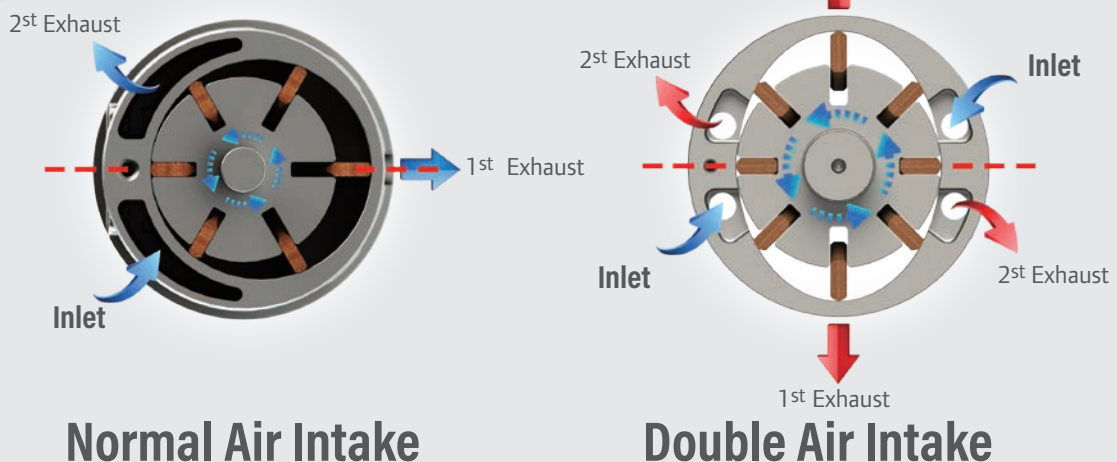

Get into tight spaces and put out more power to get tough jobs done fast

Family Members of Double-Air Intake Series



YU-09891J 1/2"
Jumbo Hammer



YU-09892T 3/8"
Twin Hammer



YU-09891T 1/2"
Twin Hammer



YU-12891T 1/2"
Twin Hammer



YU-19894T 3/4"
Twin Hammer



YU-19891T 3/4"
YU-19891T6 (6" Anvil)
Twin Hammer



YU-25893T 1"
YU-25893T8 (8" Anvil)
Twin Hammer



YU-25892T 1"
YU-25892T6 (6" Anvil)
Twin Hammer



YU-12898T 1/2"
Twin Hammer



SC-1600P 1/2"
Twin Hammer
(Industrial Type)



YU-19891TH 3/4"
YU-19891TH6 (6" Anvil)
Twin Hammer
(Industrial Type)



YU-25893TH 1"
YU-25893TH6 (6" Anvil)
YU-25893TH8 (8" Anvil)
Twin Hammer
(Industrial Type)



YU-RA3002T 3/8"
YU-RA4002T 1/2"
YU-RA6001T 3/4"
Twin Hammer



YU-RA3001J 3/8"
YU-RA4001J 1/2"
Jumbo Hammer



YU-RH3002T 3/8"
YU-RH4002T 1/2"
Twin Hammer



YU-SD406D/N (Orbit 5mm)
YU-SD405D/N (Orbit 2.5mm)

YU-09891J**1/2" Jumbo Hammer**

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	500 FT-LB (69 KG-M, 678 N-M)
	Working Torque	400FT-LB (55 KG-M, 542 N-M)
	Free Speed	11000 R.P.M
	Air Consumption	4.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	112 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/13KG/14KG/1'

**YU-09891TK
YU-09891JK****14 PCS SET 1/2" Impact wrench Kit**

Contents:

1PC	YU-09891T/YU-09891J
9PCS	Mini sockets (CR-V) 13, 14, 15, 16, 17, 18, 19, 21, 24mm
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic case
Packing	5SET/CTN/13.5KG/14.5KG/1.3'

**YU-09892T****3/8" Twin Hammer**

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2"(13mm)
	Max Torque	450 FT-LB (62 KG-M, 610 N-M)
	Working Torque	350FT-LB (48 KG-M, 475 N-M)
	Free Speed	11000 R.P.M
	Air Consumption	4.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	124 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/13KG/14KG/1'

**YU-09891TK2
YU-09891JK2****17 PCS SET 1/2" Impact wrench Kit**

Contents:

1PC	YU-09891T/YU-09891J
9PCS	Mini sockets (CR-V) 13, 14, 15, 16, 17, 18, 19, 21, 24mm
3PCS	Thin Wall impact sockets 17, 19, 21 mm (Chrome-Molybdenum)
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic case
Packing	5SET/CTN/17KG/18KG/1.3'

**YU-09891T****1/2" Twin Hammer**

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	500 FT-LB (69 KG-M, 678 N-M)
	Working Torque	400FT-LB (55 KG-M, 542 N-M)
	Free Speed	11000 R.P.M
	Air Consumption	4.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	124 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	PACKING	10PCS/CTN/13KG/14KG/1'

**YU-12891TK****14 PCS SET 1/2" Impact wrench Kit**

Contents:

1PC	YU-12891T
9PCS	Mini sockets (CR-MO) 13, 14, 15, 16, 17, 18, 19, 21, 24mm
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic case
Packing	5SET/CTN/15KG/16KG/1.3'

**YU-12891T****1/2" Twin Hammer**

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	700FT-LB (97 KG-M, 948 N-M)
	Free Speed	8300 R.P.M
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	150 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	PACKING	10PCS/CTN/16KG/18KG/1'

**YU-12891TK2****17 PCS SET 1/2" Impact wrench Kit**

Contents:

1PC	YU-12891T
9PCS	Mini sockets (CR-MO) 13, 14, 15, 16, 17, 18, 19, 21, 24mm
3PCS	Thin Wall impact sockets 17, 19, 21 mm (Chrome-Molybdenum)
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic case
Packing	5SET/CTN/18.5KG/19.5KG/1.3'



YU-19891T

3/4" Twin Hammer

YU-19891T6

3/4" Twin Hammer 6"Anvil

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed



	Square Drive	3/4"
	Bolt Capacity	1-1/4" (32 mm)
	Max Torque	1600 FT-LB (221 KG-M, 2170 N-M)
	Working Torque	1400 FT-LB (194 KG-M, 1898 N-M)
	Free Speed	5200 R.P.M
	Air Consumption	8.6 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	198 mm
	Net Weight	4.5 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/21.1KG/22.1KG/1.2' (6")4PCS/CTN/24.5KG/25.5KG/2.4'

YU-25893T

1" Twin Hammer

YU-25893T8

1" Twin Hammer 8"Anvil

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed



	Square Drive	1"
	Bolt Capacity	1-5/8" (41mm)
	Max Torque	1600 FT-LB (221 KG-M, 2170 N-M)
	Working Torque	1400 FT-LB (194 KG-M, 1898 N-M)
	Free Speed	5200 R.P.M
	Air Consumption	8.3 CFM
	Air Inlet	1/2"
	Air Pressure	90 PSI
	Overall Length	223 mm
	Net Weight	4.6 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/21.6KG/22.6KG/1.2' (8")4PCS/CTN/27.1KG/28.1KG/2.4'

YU-19894T

3/4" Mini Twin Hammer

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed



	Square Drive	3/4"
	Bolt Capacity	1" (26 mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	664 FT-LB (92 KG-M, 900 N-M)
	Free Speed	8000 R.P.M
	Air Consumption	5.0 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	155 mm
	Net Weight	1.7 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/17KG/18KG/1'

YU-25892T

1" Twin Hammer 2" Anvil

YU-25892T6

1" Twin Hammer 6" Anvil

- Inside or Outside Trigger
- Forward: 2 Speed
- Reverse: 1 Speed



	Square Drive	1"
	Bolt Capacity	1-5/8" (41 mm)
	Max Torque	1800 FT-LB (248 KG-M, 2441 N-M)
	Working Torque	1600 FT-LB (221 KG-M, 2170 N-M)
	Free Speed	4300 R.P.M
	Air Consumption	9.5 CFM
	Air Inlet	1/2"
	Air Pressure	90 PSI
	Overall Length	(2")375 mm (6")515 mm
	Net Weight	(2")7.1 kg (6")7.9 kg
	Air Hose	1/2"(13 mm)
	*PACKING	2PCS/CTN/15KG/16KG/2'



Compare to 3/4" Mini & Regular types, YU-19894T size reduced more than 30%, Weight lighter more than 20%.

	3/4" Super Mini YU-19894T	3/4" Mini	3/4" Regular
Overall Length	155 mm	200 mm	220 mm
Weight	1.7 kg	2.2 kg	3.6 kg

YU-12898T

1/2" Twin Hammer

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed
- Oil seal to prevent oil leakage after long performance.
- Light weight, high torque
- Control speed trigger
- Comfort handle
- One hand operation



	Square Drive	1/2"
	Bolt Capacity	5/8" (16 mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	800FT-LB (111 KG-M, 1085 N-M)
	Free Speed	8300 R.P.M
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	155 mm
	Net Weight	1.8 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/18KG/19KG/1'

SC-1600P

1/2" Twin Hammer

INDUSTRIAL TYPE

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed
- Work longer with less weight fatigue.
- Long service life and high efficiency in industrial and automotive applications
- Comfort handle
- One hand operation



	Square Drive	1/2"
	Bolt Capacity	5/8" (16 mm)
	Max Torque	600 FT-LB (83 KG-M, 813 N-M)
	Working Torque	450FT-LB (62 KG-M, 610N-M)
	Free Speed	8000 R.P.M
	Air Consumption	5.1 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	151 mm
	Net Weight	1.7 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/17KG/18KG/1'

Industrial Impact Wrench- Double Air Intake Series

Impact hammer with Oil-Bath mechanism ensure sufficient lubrication for industrial intensive purpose.

YU-19891TH

3/4" Twin Hammer 2" Anvil

YU-19891TH6

3/4" Twin Hammer 6" Anvil

HEAVY DUTY TYPE

- Handle Exhaust
- Forward : 2 Speed
- Reverse : 1 Speed
- Long service life and high efficiency in industrial and automotive applications
- High torque with compact design
- Removable handle, 360° adjustable



	Square Drive	3/4"
	Bolt Capacity	1-1/4" (32mm)
	Max Torque	1926 FT-LB (265 KG-M, 2600 N-M)
	Working Torque	1300 FT-LB (184 KG-M, 1800 N-M)
	Free Speed	4,500 R.P.M.
	Air Consumption	8.3 CFM
	Air Inlet	1/2"
	Air Pressure	90 PSI
	Overall Length	240 mm
	Net Weight	5.9 kg
	Air Hose	1/2" (13 mm)
	*PACKING	4PCS/CTN/24KG/25KG/1'

YU-25893TH

1" Twin Hammer 2" Anvil

YU-25893TH6

1" Twin Hammer 6" Anvil

YU-25893TH8

1" Twin Hammer 8" Anvil

HEAVY DUTY TYPE

- Handle Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed
- Long service life and high efficiency in industrial and automotive applications
- High torque with compact design
- Removable handle, 360° adjustable



	Square Drive	1"
	Bolt Capacity	1-5/8" (41 mm)
	Max Torque	1926 FT-LB (256 KG-M, 2600 N-M)
	Working Torque	1300FT-CB (184 KG-M, 1800 N-M)
	Free Speed	4500 R.P.M
	Air Consumption	8.3 CFM
	Air Inlet	1/2"
	Air Pressure	90 PSI
	Overall Length	240 mm
	Net Weight	5.9 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/24KG/25KG/1'

Palm Impact Wrench – Double Air Intake series

9

Extremely Mini & Lightweight Usable However You Want



Twin Hammer Mechanism

Durable, less vibration, excellent balance and no reaction force.

Ultra short length **85mm** only.

"Double-Air-Intake" Motor can greatly increase air flow and output powerful force.

YU-RH4002T, 1/2" YU-RH3002T, 3/8"

Twin Hammer



- Variable speed trigger
- Light weight, reduce the weight fatigue of operators.
- Low vibration, very stable and comfortable to use.
- One-hand operation for right- and left-handed users
- Aluminum housing gives the Hammer & Motor a very rugged & robust protection.
- Compact size perfectly fit in hand palm.
- Freely workable in any tight spaces, such as engine repair, under wheel arches, around brake calipers, farm, light truck, automotive service, assembly lines and so on.



YU-RH4002T

	Square Drive	1/2"
	Bolt Capacity	1/2" (13 mm)
	Max Torque	369 FT-LB (51 KG-M, 500 N-M)
	Working Torque	332 FT-LB (46 KG-M, 450 N-M)
	Free Speed	7500 R.P.M
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	85 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
*PACKING		20PCS/CTN/24.5KG/25.5KG/1.3'

YU-RH3002T

	Square Drive	3/8"
	Bolt Capacity	1/2" (13 mm)
	Max Torque	369 FT-LB (51 KG-M, 500 N-M)
	Working Torque	332 FT-LB (46 KG-M, 450 N-M)
	Free Speed	7500 R.P.M
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	88 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
*PACKING		20PCS/CTN/24.5KG/25.5KG/1.3'

Flexible Angle Impact Wrench

Double Air Intake Series

Breaking through space barriers without hassle!!

Handy & Powerful Torque Output

Twin Hammer Mechanism

Durable, less vibration, excellent balance and no reaction force.
Ultra short length **71mm** only.
(Anvil excluded)

PATENT

120° Nano Flex-Head

The head can 60 degree bend over forward & backward respectively.
Freely reach to the target bolt even in confined, restrained space.



Variable speed trigger



PATENT

"Double-Air-Intake" Motor

By increased air flow can largely deliver powerful output.

PATENT

Innovative Mechanism


Tubeless Dual Air Channel

Air flows smoothly and sufficiently even though rotating the handle and motor housing.

PATENT

360° Free Swivel Handle

The trigger is reachable by swivel handle, freely operating tool in any constrained space.

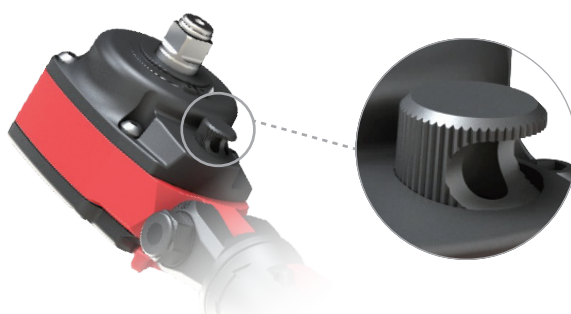

360° Adjustable Air Exhaust Exit

Exhaust exit can be adjusted according to various operational conditions.
(only for YU-RA3001J / YU-RA4001J / YU-RA6001T)





- Side Exhaust
- Forward: 1 Speed
- Reverse: 1 Speed

YU-RA4002T / YU-RA3002T

	YU-RA4002T	YU-RA3002T
Hammer Mechanism	Twin Hammer	Twin Hammer
Square Drive	1/2"	3/8"
Bolt Capacity	1/2" (13 mm)	1/2" (13 mm)
Working Torque	332 FT-LB (46 KG-M, 450 N-m)	332 FT-LB (46 KG-M, 450 N-m)
Max. Torque	369 FT-LB (51 KG-M, 500 N-m)	369 FT-LB (51 KG-M, 500 N-m)
Free Speed	8000 R.P.M.	8500 R.P.M.
Air Consumption	4.0 CFM	4.0 CFM
Air Inlet	1/4"	1/4"
Air Pressure	90 PSI	90 PSI
Air Hose	3/8" (10 mm)	3/8" (10 mm)
Overall Length	85 mm	88 mm
Net Weight	1.3 kg	1.3 kg
Packing	10pcs/CTN/15.5KG/16.5KG/0.9'	10pcs/CTN/15.5KG/16.5KG/0.9'



- Side Exhaust
- Forward: 2 Speed
- Reverse: 1 Speed

YU-RA4001J / YU-RA3001J

	YU-RA4001J	YU-RA3001J
Hammer Mechanism	Jumbo Hammer	Jumbo Hammer
Square Drive	1/2"	3/8"
Bolt Capacity	1/2" (13 mm)	1/2" (13 mm)
Working Torque	184 FT-LB (26 KG-M, 250 N-m)	184 FT-LB (26 KG-M, 250 N-m)
Max. Torque	221 FT-LB (30 KG-M, 300 N-m)	221 FT-LB (30 KG-M, 300 N-m)
Free Speed	9000 R.P.M.	9000 R.P.M.
Air Consumption	3.0 CFM	3.0 CFM
Air Inlet	1/4"	1/4"
Air Pressure	90 PSI	90 PSI
Air Hose	3/8" (10 mm)	3/8" (10 mm)
Overall Length	76 mm	76 mm
Net Weight	1.2 kg	1.2 kg
Packing	10pcs/CTN/14.2KG/15.2KG/0.9'	10pcs/CTN/14.2KG/15.2KG/0.9'



- Side Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

YU-RA6001T

	YU-RA6001T
Hammer Mechanism	Twin Hammer
Square Drive	3/4"
Bolt Capacity	1" (26 mm)
Working Torque	664 FT-LB (92 KG-M, 900 N-m)
Max. Torque	738 FT-LB (102 KG-M, 1000 N-m)
Free Speed	7,500 R.P.M.
Air Consumption	4.5 CFM
Air Inlet	3/8"
Air Pressure	90 PSI
Air Hose	3/8" (10 mm)
Overall Length	126 mm
Net Weight	2.3 kg
Packing	10pcs/CTN/26.3KG/27.3KG/1.7'

Low Air Consumption Series

Air tools with Low Air Consumption can improve the working efficiency of the air compressor, cut down electricity bill. Moreover, the energy saving and carbon reduction benefit to our living environment. Based on planet-friendly of corporate responsibility, SCORPIO created this series for years. It also includes below features of operation consideration:

- ★ Low Air Consumption
- ★ Stubby Body
- ★ Light Weight
- ★ Powerful Torque Output
- ★ One-handed Operation



Energy Saving
Carbon Reduction
Save Earth
Planet Friendly



YU-0985T 1/2"
YU-09851T 3/8"


Hidden Details



One-Handed pushing lever to control Forward and Reverse.



One-Handed switching – Forward 3 speeds, Reverse 1 speed at Maximum output.



Edging rib – a protection of motor housing, and tool decoration.

Family Members



YU-0988T/J
1/2 Mini Stubby



YU-0986T/J
1/2 Stubby



YU-0987T 1/2"
1/2 Stubby



YU-1285T
1/2 Standard



YU-1285TH
1/2 Heavy Duty



YU-1985T/2585T
3/4" & 1"

Our Low Air Consumption series work with portable air compressor can greatly improve working efficiency and increase service-life of compressor.



YU-09881T

Stubby 3/8" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2"(13mm)
	Max Torque	320 FT-LB (45 KG-M, 435 N.m)
	Working Torque	250 FT-LB (35 KG-M, 340N.m)
	Free Speed	9000 R.P.M
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	107 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
*PACKING		10PCS/CTN/11kg/12kg/0.8'



YU-0986T

Stubby 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	450 FT-LB (62 KG-M, 610 N.m)
	Working Torque	400 FT-LB (55 KG-M,543 N.m)
	Free Speed	9000 R.P.M
	Air Consumption	4.1 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	122 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
*PACKING		10PCS/CTN/13kg/14kg/1'



YU-0988T

Stubby 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	400 FT-LB (55 KG-M, 540 N.m)
	Working Torque	350 FT-LB (48 KG-M, 475 N.m)
	Free Speed	10000 R.P.M
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	107 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
*PACKING		10PCS/CTN/11kg/12kg/0.8'



YU-0986J

Stubby 1/2" Jumbo Hammer

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	450 FT-LB (62 KG-M, 610 N.m)
	Working Torque	400 FT-LB (55 KG-M,543 N.m)
	Free Speed	9000 R.P.M
	Air Consumption	4.1 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	113 mm
	Net Weight	1.2 kg
	Air Hose	3/8"(10 mm)
*PACKING		10PCS/CTN/12kg/13kg/1'



YU-0988J

Stubby 1/2" Jumbo Hammer

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	400 FT-LB (55 KG-M, 540 N.m)
	Working Torque	350 FT-LB (48 KG-M, 475 N.m)
	Free Speed	10000 R.P.M
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	95 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
*PACKING		10PCS/CTN/11kg/12kg/0.8'



Energy Saving
Carbon Reduction
Save Earth
Planet Friendly

YU-0988TK

OPTION



YU-0988JK YU-0986TK YU-0986JK

Contents:

1PC	YU-0988T
9PCS	"Mini Sockets(CR-V) 13,14,15,16,17,18,19,21,24mm"
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
*PACKING	5PCS/CTN/12.5KG/13.5KG/1.3'



YU-0988TK2

OPTION



YU-0988JK2 YU-0986TK2 YU-0986JK2

Contents:

1PC	YU-0988T
9PCS	"Mini Sockets(CR-V) 13,14,15,16,17,18,19,21,24mm"
1PCS	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
3PCS	Thin Wall Impact Sockets
	17,19,21mm(Chrome-Molybdenum)
*PACKING	5PCS/CTN/12.5KG/13.5KG/1.3'



YU-09851T**Stubby 3/8" Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2"(13mm)
	Max Torque	320 FT-LB (44 KG-M, 434 N-M)
	Working Torque	300 FT-LB (42 KG-M, 407 N-M)
	Free Speed	7500 R.P.M
	Air Consumption	4.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	122 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/13kg/14kg/1'

**YU-0985T****Stubby 1/2" Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13 mm)
	Max Torque	450 FT-LB (62 KG-M, 610 N-M)
	Working Torque	400 FT-LB (55 KG-M, 542 N-M)
	Free Speed	9000 R.P.M.
	Air Consumption	4.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	122 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/13kg/14kg/1'

**YU-0987T****Stubby 1/2" Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	550 FT-LB (76 KG-M, 746 N-M)
	Working Torque	480 FT-LB (66 KG-M, 650 N-M)
	Free Speed	7000 R.P.M.
	Air Consumption	4.37 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	145 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/1.5'

**YU-0985TK / YU-0987TK****14PCS SET 1/2" IMPACT WRENCH KIT**

Contents:

1PC	YU-0985T / YU-0987T
9PCS	Mini Sockets (CR-V) 13,14,15,16,17,18,19,21,24mm
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
PACKING'	5PCS/CTN/13.5kg/14.5kg/1.3'

YU-0985TK2 / YU-0987TK2**17PCS SET 1/2" IMPACT WRENCH KIT**

Contents:

1PC	YU-0985T / YU-0987T
9PCS	Mini Sockets (CR-V) 13,14,15,16,17,18,19,21,24mm
3PCS	Thin Wall Impact Sockets 17,19,21mm (Chrome-Molybdenum)
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
PACKING'	5PCS/CTN/16.9kg/17.9kg/1.3'



Energy Saving
Carbon Reduction
Save Earth
Planet Friendly

YU-1285T

Standard 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	900 FT-LB (125 KG-M, 1220 N-M)
	Working Torque	650 FT-LB (90 KG-M, 881 N-M)
	Free Speed	6500 R.P.M.
	Air Consumption	4.8 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	165 mm
	Net Weight	2 kg
	Air Hose	10 mm
	*PACKING	10PCS/CTN/20.2kg/21.2kg/1.5'



YU-1285TH

Heavy Duty 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	1100 FT-LB (152 KG-M, 1492 N-M)
	Working Torque	800 FT-LB (111 KG-M, 1085 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	4.9 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	186 mm
	Net Weight	2.4 kg
	Air Hose	3/8"(10 mm)
	PACKING	10PCS/CTN/24kg/25kg/1.8'



YU-1985T

Light Weight 3/4" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
Reverse: 1 Speed

	Square Drive	3/4"
	Bolt Capacity	1"(26 mm)
	Max Torque	1100 FT-LB (152 KG-M, 1492 N-M)
	Working Torque	900 FT-LB (124 KG-M, 1220 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	4.9 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	191 mm
	Net Weight	2.6 kg
	Air Hose	1/2"(13 mm)
	PACKING	10PCS/CTN/26kg/27kg/1.8'



OPTION



YU-1285THK

YU-1285TK/YU-1285THK

17PCS SET 1/2" IMPACT WRENCH KIT

Contents:	
1PC	YU-1285T/YU-1285TH
10PCS	Air Sockets (Chrome-Molybdenum) 9,10,11,13,14,17,19,22,24,27mm
1PC	5"Extension Bar
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
1PC	Mini Oiler
PACKING	5PCS/CTN/20.2kg/21.2kg/1.6'



OPTION



YU-1285THK2

YU-1285TK2 / YU-1285THK2

12PCS SET 1/2" IMPACT WRENCH KIT

Contents:	
1PC	YU-1285T / YU-1285TH
6PCS	Air Deep Sockets (Chrome-Molybdenum) 17,19,21mm with Plastic Sleeves 22,23,24mm
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
1PC PACKING	Mini Oiler
	5PCS/CTN/21.5kg/22.5kg/1.6'

YU-2585T

Light Weight 1" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed
Reverse: 1 Speed

	Square Drive	1"
	Bolt Capacity	1-1/8"(28mm)
	Max Torque	1100 FT-LB (152 KG-M, 1492 N-M)
	Working Torque	900 FT-LB (124 KG-M, 1220 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	5.2 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	209 mm
	Net Weight	2.9 kg
	Air Hose	1/2"(13 mm)
	PACKING	10PCS/CTN/29kg/30kg/2'



YU-0981T**3/8" Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed / Reverse: 3 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2"(13mm)
	Max Torque	280 FT-LB (39 KG-M, 380 N-M)
	Working Torque	260 FT-LB (36 KG-M, 353 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	170 mm
	Net Weight	1.2 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/12kg/13kg/1'

**YU-0982T****1/2" Mini Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed / Reverse: 3 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2"(13mm)
	Max Torque	320 FT-LB (44 KG-M, 434 N-M)
	Working Torque	280 FT-LB (39 KG-M, 380 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	170 mm
	Net Weight	1.2 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/12kg/13kg/1'

**YU-0983T****3/8" Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed / Reverse: 3 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2"(13mm)
	Max Torque	330 FT-LB (46 KG-M, 450 N-M)
	Working Torque	300 FT-LB (41 KG-M, 400 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	5 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	170 mm
	Net Weight	1.3kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/14kg/15kg/1'

**YU-0984T****1/2" Mini Twin Hammer**

- Handle Exhaust
- Forward: 3 Speed / Reverse: 3 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	420 FT-LB (58 KG-M, 570 N-M)
	Working Torque	400 FT-LB (55 KG-M, 540 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	5 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	170 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/14kg/15kg/1'

**YU-0981TK****YU-0983TK****19Pcs Set 3/8"****Composite Impact Wrench Kit**

Contents:	
1PC	YU-0981T
10PCS	Air Sockets (Chrome-Molybdenum) 8,10,11,12,13,14,16,17,19,21mm
4PC	Deep Air Sockets 8, 10, 12, 14mm
1PC	Nipple
1PC	4mm Hex Wrench
1PC	75mm extension bar
1PC	Plastic case
*PACKING	5Sets/CTN/16kg/17kg/1.3'

**OPTION****YU-0983T****YU-0982TK****YU-0984TK****17Pcs Set 1/2" Mini****Composite Impact Wrench Kit**

Contents:	
1PC	YU-0982T
10PCS	Air Sockets (CR-V) 9,10,11,13,14,17,19,22,24,27mm
1PC	5"Extension Bar
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic case
1PC	Mini Oiler
*PACKING	5Sets/CTN/16kg/17kg/1.3'

**OPTION****YU-0984T****YU-0982TK3****YU-0984TK3****9Pcs Set 1/2" Mini****Composite Impact Wrench Kit**

Contents:	
1PC	YU-0982T
3PCS	Thin Wall Impact Sockets 17, 19, 21 mm (Chrome-Molybdenum)
1PC	4mm Hex Wrench
1PC	Oil Pot
1PC	Mini Oiler
1PC	Nipple
1PC	Plastic case
*PACKING	5Sets/CTN/16kg/17kg/1.3'

**OPTION****YU-0984T**

YU-1281P

1/2" New Pin Clutch

YU-1281P2

1/2" New Pin Clutch 2" ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	900 FT-LB (124 KG-M, 1200 N-M)
	Working Torque	650 FT-LB (90 KG-M, 881 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	208 mm (2") : 246 mm
	Net Weight	2.06 kg (2") : 2.16 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/20.6kg/21.6kg/1.4' (2")10PCS/CTN/21.6kg/22.6kg/1.4'



YU-1281T

1/2" Twin Hammer

YU-1281T2

1/2" Twin Hammer 2" ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	750 FT-LB (104 KG-M, 1017 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	193mm (2") : 245 mm
	Net Weight	2.02 kg (2") : 2.12 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/20.2kg/21.2kg/1.4' (2")10PCS/CTN/21.2kg/22.2kg/1.4'



YU-1282T

1/2" Twin Hammer

YU-1282T2

1/2" Twin Hammer 2" ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	750 FT-LB (104 KG-M, 1017 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI (2"):244 mm
	Overall Length	195 mm (2"):2.15 kg
	Net Weight	2.05 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/20.5kg/21.5kg/1.4'



YU-1281TK

YU-1281PK

YU-1282TK



OPTION



YU-1281PK



YU-1282TK

17PCS 1/2" IMPACT WRENCH KIT

Contents:

1PC	YU-1281T / YU-1281P / YU-1282T
10PCS	Air Sockets (Chrome-Molybdenum) 9,10,11,13,14,17,19,22,24,27mm
1PC	5" Extension Bar
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic case
1PC	Mini Oilier
*PACKING	5 Sets/CTN/20kg/21kg/1.6'

YU-1281TK2

YU-1281PK2

YU-1282TK2



OPTION



YU-1281PK2



YU-1282TK2

12PCS 1/2" IMPACT WRENCH KIT

Contents:

1PC	YU-1281T / YU-1281P / YU-1282T
6 PCS	Air Deep Sockets (Chrome-Molybdenum) 17,19,21mm with Plastic Sleeves 22,23,24mm
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic case
1PC	Mini Oilier
*PACKING	5 Sets/CTN/21.5kg/22.5kg/1.6'

YU-1930T

3/4" Mini Twin Hammer

YU-1930T6

3/4" Mini Twin Hammer 6"ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

	Square Drive	3/4"
	Bolt Capacity	1"(26 mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	800 FT-LB (111 KG-M, 1085 N-M)
	Free Speed	9000R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	200 mm (6") : 353 mm
	Net Weight	2.2 kg (6") : 2.64 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/22kg/23kg/1.4' (6")8PCS/CTN/21kg/22kg/1.9'

**YU-1932T**

3/4" Mini Twin Hammer

YU-1932T6

3/4" Mini Twin Hammer 6"ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

	Square Drive	3/4"
	Bolt Capacity	1" (26mm)
	Max Torque	1000 FT-LB (138 KG-M, 1356 N-M)
	Working Torque	800 FT-LB (111 KG-M, 1085 N-M)
	Free Speed	9000 R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI (6") : 357 mm
	Overall Length	204 mm (6") : 2.64 kg
	Net Weight	2.2 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/22kg/23kg/1.4' (6")8PCS/CTN/21kg/22kg/1.9'

**YU-1982T**

3/4" Twin Hammer

YU-1982T6

3/4" Twin Hammer 6"ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 3 Speed

	Square Drive	3/4"
	Bolt Capacity	1 1/8"(28mm)
	Max Torque	1200 FT-LB(165 KG-M, 1630 N-M)
	Working Torque	1000 FT-LB(138 KG-M, 1356 N-M)
	Free Speed	5500R.P.M.
	Air Consumption	7 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	221mm (6") : 370 mm
	Net Weight	3.6 kg (6") : 4.2kg
	Air Hose	1/2"(13 mm)
	*PACKING	6PCS/CTN/21.6kg/22.6kg/1.5' (6")4PCS/CTN/16.8kg/17.8kg/1.6'

**YU-1982TK**

14Pcs Set 3/4" Impact Wrench Kit

Contents:

1PC	YU-1982T
8PCS	Air Sockets (CR-MO) 26,27,29,30,32,35,36,38mm
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	5mm Hex Wrench
1PC	Nipple
1PC	Plastic case
*PACKING	3Sets/CTN/21.5kg/22.5kg/1.6'

**YU-2581T**

1" Twin Hammer

YU-2581T6


1" Twin Hammer 6"ANVIL

- Handle Exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

Light Weight! 5.1kg
High Torque! 1500 FT.LB




	Square Drive	1"
	Bolt Capacity	1-5/8(41mm)
	Max Torque	1500 FT-LB (207 KG-M, 2034 N-M)
	Working Torque	1300 FT-LB (180 KG-M, 1763 N-M)
	Free Speed	5300 R.P.M.
	Air Consumption	7 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	256 mm (6") : 395mm
	Net Weight	5.1 kg (6") : 5.83kg
	Air Hose	1/2"(13 mm)
	*PACKING	5 pcs/CTN/25.5kg/26.5kg/1.6' (6")4 pcs/CTN/24kg/25kg/2.2'



Changeable position of the support handle to suit varied working space.

Super Heavy Duty

Lightweight, reduce operational fatigue for longer work.

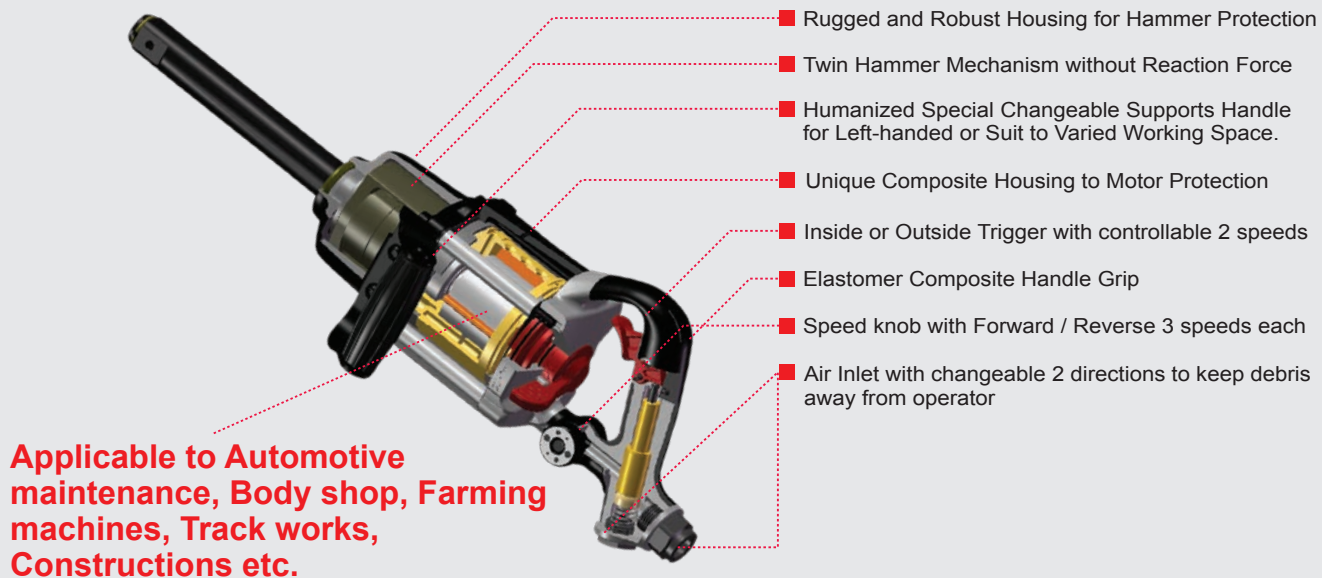

YU-2583T6

1" Twin Hammer 6"ANVIL

YU-2583T

1" Twin Hammer 2"ANVIL



- Forward : 3 Speed Reverse : 3 Speed
- Inside or Outside Trigger With 2 Speed Control
- Two Way Changeable Air Inlet Direction For Comfort Workplace.
- Humanized Special Changeable Supports Handle For Left-hander Purpose.

	Square Drive	1"
	Bolt Capacity	1 3/4" (45mm)
	Max Torque	2000 FT-LB (290 KG-M, 2800 N-M)
	Working Torque	1800 FT-LB (245 KG-M, 2400 N-M)
	Free Speed	5000R.P.M.
	Air Consumption	9.0 CFM
	Sound Pressure Level	93.6 dB(A)
	Sound Power Level	104.6 dB(A)
	Vibration Level	5 m/s ²
	Air Inlet	1/2"
	Air Pressure	90PSI
	Overall Length	550mm (2") : 443mm
	Net Weight	8kg (2") : 7.1kg
	Air Hose	1/2"(13mm)
*PACKING		1PC/Brown Plain Box/8kg/10kg/1' 1PC/Color Box,2PC/CTN/16kg/19.4kg/2.4'



1/4" & 3/8" Aluminum Impact Wrench – Twin Hammer / Double Hammer / Rocking Dog

Super Mini, Handy & Steady Performance

Industrial Application: Assembly, production, wooden constructing, bike maintenance and so on.



	Model(YU-)	Square Drive	Hammer Mechanism	Bolt Capacity	Working Torque(Nm)	Max. Torque (Nm)	Free Speed (Nm)	Air Cons. (CFM)	Air Inlet	Air Hose	Overall Length(mm)	Net Weight(kg)
Screw Drive	YU-503H	X	Twin Hammer	6-8 mm	50	60	10,000	2.26	1/4"	1/4"	144	0.9
Impact Wrench	YU-503H1	1/4"	Twin Hammer	12 mm	80	100	10,000	2.26	1/4"	1/4"	134	0.9
Impact Wrench	YU-503H2	3/8"	Twin Hammer	13 mm	95	120	10,000	2.26	1/4"	1/4"	136	0.9

- Rear Exhaust
- Forward: 4 Speed (10N.m / 20N.m / 30N.m / 40N.m)
- Reverse: 4 Speed (10N.m / 20N.m / 30N.m / 40N.m)

YU-0903RM

Butterfly Impact Wrench
3/8" Rocking Dog



	Square Drive	3/8"
	Bolt Capacity	1/2" (13 mm)
	Max Torque	75 FT-LB (10 KG-M, 100 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	171 mm
	Net Weight	1.1 kg
	Air Hose	3/8"(10 mm)
	*PACKING	20PCS/CTN/22kg/23kg/1'

YU-0601R

1/4" Double Hammer



	Square Drive	1/4"
	Bolt Capacity	12MM
	Max Torque	30 FT-LB (4 KG-M, 40 N-M)
	Free Speed	11000 R.P.M.
	Air Consumption	5.3 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	140 mm
	Net Weight	0.8 kg
	Air Hose	3/8"(10 mm)
	*PACKING	20PCS/CTN/16kg/17kg/1.5'

YU-0601RK

9PCS Set 1/4"
Impact Wrench Kit



1PC	YU-0601R
5PCS	Deep Sockets (CR-V) 8,9,10,11,12mm
1PC	2" Extension Bar
1PC	Dr. Impact Universal Joint
1PC	Metal Case
*PACKING	8Sets/CTN/18kg/19kg/1'

YU-0900P

3/8" New Pin Clutch

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2" (13mm)
	Max Torque	160 FT-LB (22 KG-M, 216 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	163 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/1'



YU-0902P

1/2" New Pin Clutch

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2" (13mm)
	Max Torque	160 FT-LB (22 KG-M, 216 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	163 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/1'



YU-0940P

3/8" New Pin Clutch

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	3/8" (1/2")
	Bolt Capacity	1/2" (13mm)
	Max Torque	160 FT-LB (22 KG-M, 216 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	149 mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	PACKING	10PCS/CTN/13kg/14kg/1'



YU-0942P

1/2" New Pin Clutch

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1/2"
	Bolt Capacity	1/2" (13mm)
	Max Torque	160 FT-LB (22 KG-M, 216 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	149mm
	Net Weight	1.3 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/13kg/14kg/1'



YU-0904T

3/8" Twin Hammer

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	3/8"
	Bolt Capacity	1/2" (13mm)
	Max Torque	280 FT-LB (39 KG-M, 380 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	163 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/1'



YU-0906T

1/2" Twin Hammer

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8"(16 mm)
	Max Torque	320 FT-LB (44 KG-M, 430 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	163 mm
	Net Weight	1.6 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/1'



YU-0900PK YU-0904TK YU-0940PK

19 pcs Set 3/8" Impact Wrench Kit

Contents:	
1PC	YU-0900P / YU-0904T / YU-0940P
10PCS	Air Sockets (Chrome-Molybdenum) 8, 10, 11, 12, 13, 14, 16, 17, 19, 21 mm
4PCS	Deep Air Sockets 8, 10, 12, 14 mm
1PC	Nipple
1PC	4 mm Hex Wrench
1PC	75 mm Extension Bar
	Plastic Case
*PACKING	5Sets/CTN/16kg/17kg/1.3'



YU-0902PK3 YU-0906TK3 YU-0942PK3

9 pcs Set 1/2" Mini Impact Wrench Kit

Contents:	
1PC	4mm Hex Wrench
1PC	Oil Pot
1PC	Mini Oiler
1PC	Nipple
1PC	Plastic Case
1PC	YU-0906T/YU-0902P/YU0942P
3PCS	Thin Wall Impact Sockets 17, 19, 21 mm (Chrome-Molybdenum)
*PACKING	5Sets/CTN/16kg/17kg/1.3'



YU-1200P New Pin Clutch**YU-1200P2** 2" Anvil

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16 mm)
 Max Torque	450 FT-LB (62 KG-M, 610 N-M)
 Free Speed	9000 R.P.M.
 Air Consumption	5.0 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	190 mm (2") : 225 mm
 Net Weight	2.4 kg (2") : 2.5 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'

**YU-1202P** New Pin Clutch**YU-1202P2** 2" Anvil

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16 mm)
 Max Torque	480 FT-LB (66 KG-M, 650 N-M)
 Free Speed	7000 R.P.M.
 Air Consumption	5.0 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	190mm (2") : 225 mm
 Net Weight	2.4 kg (2") : 2.5 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'

**YU-1210P** New Pin Clutch**YU-1210P2** 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 1 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16mm)
 Max Torque	400FT-LB(55KG-M, 543N-M)
 Free Speed	9,000 R.P.M.
 Air Consumption	4.8 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	190mm
 Net Weight	2.0 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/20kg/21kg/1.4' (2")10PCS/CTN/21kg/22kg/1.4'

**YU-1260P** New Pin Clutch**YU-1260P2** 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 1 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16mm)
 Max Torque	600 FT-LB (84 KG-M, 813 N-M)
 Free Speed	6500 R.P.M.
 Air Consumption	4.2 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	198 mm (2") : 230 mm
 Net Weight	2.8 kg (2") : 2.9 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/28kg/29kg/1.4' (2")10PCS/CTN/29kg/30kg/1.4'

**YU-1210PH** New Pin Clutch**YU-1210PH2** 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 1 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16mm)
 Max Torque	430 FT-LB (59 KG-M, 583 N-M)
 Free Speed	8500 R.P.M.
 Air Consumption	4.8 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	190mm
 Net Weight	2.3 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/23kg/24kg/1.4' (2")10PCS/CTN/24kg/25kg/1.4'

**YU-1270P** New Pin Clutch**YU-1270P2** 2" Anvil

- Handle Exhaust
- Forward: 3 Speed / Reverse: 1 Speed

 Square Drive	1/2"
 Bolt Capacity	5/8" (16mm)
 Max Torque	400 FT-LB (55 KG-M, 543 N-M)
 Free Speed	8000 R.P.M.
 Air Consumption	4.0 CFM
 Air Inlet	1/4"
 Air Pressure	90 PSI
 Overall Length	197 mm (2") : 238 mm
 Net Weight	2.4 kg (2") : 2.5 kg
 Air Hose	3/8"(10 mm)
*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'

**YU-1200PK**

Contents:

1PC	YU-1200P
1PC	5"Extension Bar
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
1PC	Mini Oiler
10PCS	Air Sockets (CR-V))
	9,10,11,13,14,17,19,22,24,27mm
*PACKING	5Sets/CTN/22kg/23kg/1.6'

**OPTION**

YU-1202PK YU-1210PK YU-1210PHK YU-1202TK
YU-1270PK YU-1280TK YU-1290TK

YU-1210PK2

Contents:

1PC	YU-1210P
6PCS	Air Deep Sockets (Chrome-Molybdenum)
	17,19,21mm with Plastic Sleeves
	22,23,24mm
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
1PC	Mini Oiler
*PACKING	5 Sets/CTN/20.5kg/21.5kg/1.6'



outside and inside plastic sleeves to protect frames and wheel-nuts

17-19-21 mm 22-23-24 mm

OPTION

YU-1210PHK2
YU-1260PK2
YU-1260TK2
YU-1260PK

YU-0907T Stubby 1/2" Twin Hammer

- Handle Exhaust
- Forward: 3 Speed / Reverse: 3 Speed

	Square Drive	1/2"
	Bolt Capacity	14 mm
	Max Torque	450 FT-LB (62 KG-M, 610 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	5.8 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	122 mm
	Net Weight	1.56 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/16kg/17kg/0.7'



YU-0907TK

14pcs Set 1/2" Impact Wrench Kit

Contents:

1PC	YU-0907T
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
9PCS	Mini Sockets (CR-V)
	13,14,15,16,17,18,19,21,24mm

*PACKING 5Sets/PCS/CTN/15kg/16kg/1.3'



YU-1202T Twin Hammer YU-1202T2 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	500 FT-LB (69 KG-M, 678 N-M)
	Free Speed	7000 R.P.M.
	Air Consumption	5.0 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	175 mm (2") : 220 mm
	Net Weight	2.4 kg (2") : 2.5 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'



YU-0907TK2

17pcs Set 1/2" Impact Wrench Kit

Contents:

1PC	YU-0907T
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case
9PCS	Mini Sockets (CR-V)
	13,14,15,16,17,18,19,21,24mm
3PCS	Thin Wall Impact Sockets
	17,19,21mm (Chrome-Molybdenum)

*PACKING 5Sets/PCS/CTN/18.5kg/19.5kg/1.3'



YU-1260T Twin Hammer YU-1260T2 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	700 FT-LB (97 KG-M, 949 N-M)
	Free Speed	7000 R.P.M.
	Air Consumption	4.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	182 mm (2") : 214 mm
	Net Weight	2.8 kg (2") : 2.9 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/28kg/29kg/1.4' (2")10PCS/CTN/29kg/30kg/1.4'



YU-1260TK

Contents:

1PC	YU-1260T
1PC	5" Extension Bar
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
1PC	Mini Oiler
10PCS	Air Sockets (Chrome -Molybdenum)
	9,10,11,13,14,17,19,22,24,27 mm

*PACKING 5Sets/CTN/23.5kg/24.5kg/1.8'



OPTION

YU-1210PK YU-1210PHK YU-1260PK

YU-1280T Twin Hammer YU-1280T2 2" Anvil

- Handle Exhaust
- Forward: 3 Speed / Reverse: 1 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	400 FT-LB (55 KG-M, 543 N-M)
	Free Speed	7000 R.P.M.
	Air Consumption	4.0 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	175 mm (2") : 220 mm
	Net Weight	2.4 kg (2") : 2.5 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'



YU-1290T Twin Hammer YU-1290T2 2" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1/2"
	Bolt Capacity	5/8" (16mm)
	Max Torque	425 FT-LB (58 KG-M, 576 N-M)
	Free Speed	7000 R.P.M.
	Air Consumption	5.0 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	175 mm (2") : 220 mm
	Net Weight	2.4 kg (2") : 2.5 kg
	Air Hose	3/8"(10 mm)
	*PACKING	10PCS/CTN/24kg/25kg/1.3' (2")10PCS/CTN/25kg/26kg/1.4'



YU-1920P New Pin Clutch
YU-1920P6 6" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 1 Speed



	Square Drive	3/4"
	Bolt Capacity	1" (26mm)
	Max Torque	850 FT-LB (117 KG-M, 1154 N-M)
	Free Speed	4500 R.P.M.
	Air Consumption	4.8 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	237mm
	Net Weight	4.0 kg
	Air Hose	1/2"(13 mm)
	*PACKING	6PCS/CTN/24kg/25kg/1.5' (6") 4PCS/CTN/18kg/19kg/1.6'

YU-1980P Pin Clutch
YU-1980P6 6" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed



	Square Drive	3/4"
	Bolt Capacity	1-1/8" (28mm)
	Max Torque	900 FT-LB (124 KG-M, 1220 N-M)
	Free Speed	6000 R.P.M.
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	252 mm
	Net Weight	4.6 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/20kg/21kg/1.24' (6") 4PCS/CTN/22kg/23kg/1.6'

YU-1981P Pin Clutch
YU-1981P6 6" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed



	Square Drive	3/4"
	Bolt Capacity	1-1/8" (28mm)
	Max Torque	900 FT-LB (124 KG-M, 1220 N-M)
	Free Speed	6000 R.P.M.
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	252 mm
	Net Weight	4.6 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/20kg/21kg/1.24' (6") 4PCS/CTN/22kg/23kg/1.6'

YU-1980T Twin Hammer
YU-1980T6 6" Anvil

- Handle Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed



	Square Drive	3/4"
	Bolt Capacity	1-1/8" (28mm)
	Max Torque	900 FT-LB (124 KG-M, 1220 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	5.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	210 mm
	Net Weight	4.2 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/16.8kg/17.8kg/1.24' (6") 4PCS/CTN/18.8kg/19.8kg/1.6'

YU-1980R Rocking Dog
YU-1980R6 6" Anvil

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed



	Square Drive	3/4"
	Bolt Capacity	7/8" (20mm)
	Max Torque	500 FT-LB (70 KG-M, 678 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	252 mm
	Net Weight	4.6 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/20kg/21kg/1.24' (6") 4PCS/CTN/22kg/23kg/1.6'

YU-1980PK
 14Pcs 3/4" Impact Wrench Kit


Contents :

1PC	YU-1980P
8PCS	Air Sockets (CR-MO) 26,27,29,30,32,35,36,38mm
1PC	Oil Pot
1PC	4mm Hex Wrench
1PC	5mm Hex Wrench
1PC	Nipple
1PC	Plastic Case
*PACKING	3 Sets/CTN/26kg/27kg/1.6'

OPTION
YU-1920PK YU-1980TK
YU-1980RK YU-1981PK

YU-2500R Rocking Dog

- Side Exhaust
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1"
	Bolt Capacity	1-5/8" (41mm)
	Max Torque	1400 FT-LB (193 KG-M, 1895 N-M)
	Free Speed	3500 R.P.M.
	Air Consumption	6.8 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	310 mm
	Net Weight	11.3 kg
	Air Hose	1/2"(13 mm)
	*PACKING	2PCS/CTN/22.6kg/25.3kg/1.4'



YU-2500T Twin Hammer YU-2500T8 8" Anvil

- Side Exhaust
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1"
	Bolt Capacity	2" (50mm)
	Max Torque	2500 FT-LB (345 KG-M 3390 N-M)
	Free Speed	3800 R.P.M.
	Air Consumption	6.8 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	302 mm
	Net Weight	11.8 kg
	Air Hose	1/2"(13 mm)
	*PACKING	2PCS/CTN/23.6kg/26.3kg/1.4' (8")1PCS/CTN/13kg/14kg/0.9'



YU-2580PL Pin Less

- Side Exhaust
- Forward: 4 Speed
Reverse: 4 Speed

	Square Drive	1"
	Bolt Capacity	1-3/4" (45mm)
	Max Torque	2200 FT-LB (304 KG-M, 2983 N-M)
	Free Speed	3800 R.P.M.
	Air Consumption	6.8 CFM
	Air Inlet	3/8"
	Air Pressure	90 PSI
	Overall Length	306 mm
	Net Weight	12.4 kg
	Air Hose	1/2"(13 mm)
	*PACKING	2PCS/CTN/24.8kg/27.5kg/1.4'



YU-2520P New Pin Clutch YU-2520P6 6" Anvil

- Side Exhaust
- One-handed pushing button for Forward/ Reverse
- Forward: 4 Speed / Reverse: 4 Speed

	Square Drive	1"
	Bolt Capacity	1-1/2" (38mm)
	Max Torque	1300 FT-LB (180 KG-M, 1765 N-M)
	Free Speed	5000 R.P.M.
	Air Consumption	5.2 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	252 mm (6"):360 mm
	Net Weight	5.0 kg (6"): 5.8 kg
	Air Hose	1/2"(13 mm)
	*PACKING	4PCS/CTN/20kg/22kg/1.24" (6") 4PCS/CTN/23.2kg/25.8kg/1.6"




- Forward: 3 Speed
Reverse: 3 Speed
- Option: Inside Trigger
Outside Trigger

YU-2590PL8 8" ANVIL

YU-2590PL 2" ANVIL

	Square Drive	1"
	Bolt Capacity	1-3/4" (45mm)
	Max Torque	2000FT-LB(277KG-M, 2712N-M)
	Free Speed	3,400R.P.M.
	Air Consumption	8.2 CFM
	Air Inlet	1/2"
	Air Pressure	90PSI
	Overall Length	625mm (2") : 443mm
	Net Weight	14.5kg (2") : 13.1kg
	Air Hose	1/2"(13mm)
	*PACKING	1PCS/CTN/14.5kg/15.5 kg/1' (2") 1PCS/CTN/13.1kg/14.1kg /1'

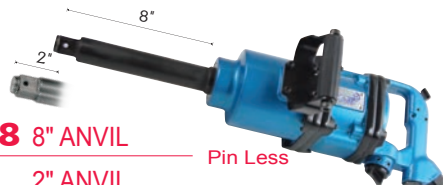


- Forward: 3 Speed
Reverse: 3 Speed
- Option: Inside Trigger
Outside Trigger

YU-2590T8 8" ANVIL

YU-2590T 2" ANVIL

	Square Drive	1"
	Bolt Capacity	2" (50mm)
	Max Torque	2000FT-LB(277KG-M, 2712N-M)
	Free Speed	3,400R.P.M.
	Air Consumption	8.2CFM
	Air Inlet	1/2"
	Air Pressure	90PSI
	Overall Length	597mm (2") : 432mm
	Net Weight	13.5kg (2") : 11.7kg
	Air Hose	1/2"(13mm)
	*PACKING	1PCS/CTN/13.5kg/14.5 kg/1' (2") 1PCS/CTN/11.7kg/12.7kg/1'

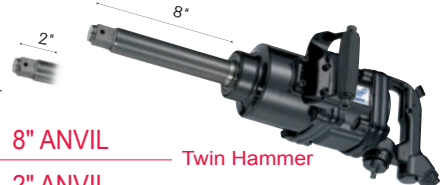


- Forward: 3 Speed
Reverse: 3 Speed
- Option: Inside Trigger
Outside Trigger

YU-2570PL8 8" ANVIL

YU-2570PL 2" ANVIL

	Square Drive	1"
	Bolt Capacity	2" (50mm)
	Max Torque	2500 FT-LB (345 KG-M, 3390 N-M)
	Free Speed	3000 R.P.M.
	Air Consumption	8.5 CFM
	Air Inlet	1/2"
	Air Pressure	90PSI
	Overall Length	630mm (2") : 443mm
	Net Weight	15.9kg (2") : 14kg
	Air Hose	1/2"(13mm)
	*PACKING	1PCS/CTN/15.9kg/16.9 kg/1' (2") 1PCS/CTN/14kg/15kg/1'

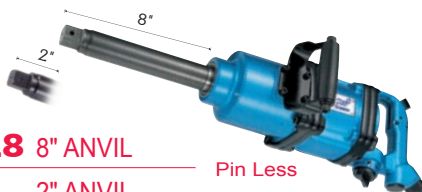


- Forward: 3 Speed
Reverse: 3 Speed
- Option: Inside Trigger
Outside Trigger

YU-2570T8 8" ANVIL

YU-2570T 2" ANVIL

	Square Drive	1"
	Bolt Capacity	2" (50mm)
	Max Torque	2500 FT-LB (345 KG-M, 3390 N-M)
	Free Speed	3 000 R.P.M.
	Air Consumption	8.5CFM
	Air Inlet	1/2"
	Air Pressure	90PSI
	Overall Length	622mm (2") : 453mm
	Net Weight	14.6kg (2") : 13.1kg
	Air Hose	1/2"(13mm)
	*PACKING	1PCS/CTN/14.6kg/15.6 kg/1' (2") 1PCS/CTN/13.1kg/14.1kg/1'

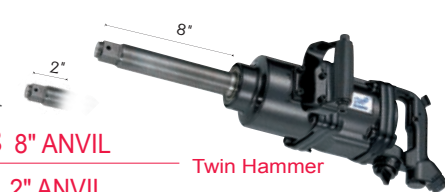

OPTION!
Blue handle grip**YU-RA38**

3/8" AIR RATCHET WRENCH

**YU-RA12**

1/2" AIR RATCHET WRENCH

	Free Speed	160 R.P.M.
	Max Torque	90 FT-LB. (122 N-M)
	Square Drive	3/8"(1/2")
	Air Pressure	90 PSI
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Hose	3/8"(10mm)
	Overall Length	254 mm
	Net Weight	1.2 kg
	*PACKING	20PCS/CTN/25kg/26kg/0.78'

YU-RA38A

3/8" AIR RATCHET WRENCH

**YU-RA12A**

1/2" AIR RATCHET WRENCH

	Free Speed	160 R.P.M.
	Max Torque	90 FT-LB. (122 N-M)
	Square Drive	3/8"(1/2")
	Air Pressure	90 PSI
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Hose	3/8"(10mm)
	Overall Length	254 mm
	Net Weight	1.2 kg
	*PACKING	20PCS/CTN/25kg/26kg/0.78'

YU-RA382

3/8" AIR RATCHET WRENCH

**YU-RA122**

1/2" AIR RATCHET WRENCH

	Free Speed	200 R.P.M.
	Max Torque	96 FT-LB.(130N-M)
	Square Drive	3/8"(1/2")
	Air Pressure	90 PSI
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Hose	3/8"(10mm)
	Overall Length	330 mm
	Net Weight	1.83 kg
	*PACKING	10PCS/CTN/19kg/20kg/0.58'

YU-RA381

3/8" AIR RATCHET WRENCH

**YU-RA121**

1/2" AIR RATCHET WRENCH

	Free Speed	320 R.P.M.
	Max Torque	180 FT-LB (245 N-M)
	Square Drive	3/8"(1/2")
	Air Pressure	90 PSI
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Hose	3/8"(10mm)
	Overall Length	318 mm
	Net Weight	1.49 kg
	*PACKING	10PCS/CTN/14.9kg/15.9kg/1.32'

YU-RA204

1/4" MINI AIR RATCHET WRENCH

**YU-RA204A**

3/8" MINI AIR RATCHET WRENCH

	Free Speed	260 R.P.M.
	Max Torque	25 FT-LB (35 N-M)
	Square Drive	1/4" (3/8")
	Air Pressure	90 PSI
	Air Consumption	5C FM
	Air Inlet	1/4"
	Air Hose	1/4"(6.3mm)
	Overall Length	160 mm
	Net Weight	0.5 kg
	*PACKING	20PCS/CTN/10kg/12kg/0.4'

**YU-RA204A**
3/8" SQ. DR.**YU-RA206**

1/4" STUBBY AIR RATCHET WRENCH

**YU-RA206A**

3/8" STUBBY AIR RATCHET WRENCH

	Free Speed	260 R.P.M.
	Max Torque	20 FT-LB (27 N-M)
	Square Drive	1/4" (3/8")
	Air Pressure	90 PSI
	Air Consumption	6.5 CFM
	Air Inlet	1/4"
	Air Hose	1/4"(6.3mm)
	Overall Length	130 mm
	Net Weight	0.44 kg
	*PACKING	20PCS/CTN/9kg/10kg/0.4'

**YU-RA206A**
3/8" SQ. DR.

The ratchet wrench can be used in narrow working spaces and tighten places that other air tools can not reach on.



YU-RA209**Air Narrow Ratchet Wrench**

	Free Speed	170 R.P.M.
	Bolt Size Capacity	10, 11, 12, 13, 14 mm
	Working Torque	11 FT-LB(15 N-M)
	Max Torque	18 FT-LB(24 N-M)
	Air Pressure	90 PSI
	Air Consumption	7.5 CFM
	Overall Length	340 mm
	Air Inlet	1/4"
	Air Hose	3/8"(10mm)
	Net weight	1.8 kgs
	*PACKING	10PC/CTN/18.7 kg/21.6 kg/1.4'

- Rear Exhaust
- Remove: First, Loosen bolt by wrench then take bolt out with air ratchet
- Fasten: Push trigger to position the bolt then lock it with torque wrench.

Model no :

YU-RA209-10	Bolt Size Capacity: 10mm
YU-RA209-11	Bolt Size Capacity: 11mm
YU-RA209-12	Bolt Size Capacity: 12mm
YU-RA209-13	Bolt Size Capacity: 13mm
YU-RA209-14	Bolt Size Capacity: 14mm



UNIT : (mm)

Air Screw Driver

Super Mini but Ultra Durable for Industrial Intensive Use.

Light & Handy, Lasting 9 hours operation NO damage!!

Application : General maintenance, mechanical assembly, wood, PVC, repair shop and so on.

YU-503H Twin Hammer

Model No.	YU-503H
Mechanism	Twin Hammer
Bolt Capacity	6-8 mm
Free Speed	10,000 RPM
Max. Torque	60 N-M
Air Consumption	2.2 CFM
Air Pressure	90 PSI
Overall Length	144 mm
Net Weight	0.9 kg
Packing	10PCS/CTN/9.6kg/10.6kg/0.7'



YU-501H Twin Hammer

YU-801H Twin Hammer

Model No.	YU-501H	YU-801H
Mechanism	Twin Hammer	Twin Hammer
Bolt Capacity	6-8 mm	8-10 mm
Free Speed	10,000 RPM	10,000 RPM
Max. Torque	50 N-M	60 N-M
Air Consumption	2.1 CFM	2.0 CFM
Air Pressure	90 PSI	90 PSI
Overall Length	195 mm	210 mm
Net Weight	0.8 kg	0.8 kg
Packing	10PCS/CTN/19.1kg/20.1kg/0.7'	



YU-5MA Double Hammer

	Bolt Capacity	5-7 mm
	Max Torque	25-30 N.m.
	Free Speed	9000 R.P.M.
	Overall Length	190 mm
	Air Consumption	2 CFM
	Air Pressure	90 PSI
	Net Weight	0.83 kg
	*PACKING	25PCS/CTN/24kg/25kg/0.8'



YU-8MA Double Hammer

	Bolt Capacity	8-10 mm
	Max Torque	50 N.m.
	Free Speed	8500 R.P.M.
	Overall Length	210 mm
	Air Consumption	2.5 CFM
	Air Pressure	90 PSI
	Net Weight	1.1 kg
	*PACKING	25PCS/CTN/25kg/26 kg/1.1'



YU-9MA Double Hammer

	Bolt Capacity	6-10 mm
	Max Torque	80 N.m.
	Free Speed	8000 R.P.M.
	Overall Length	210 mm
	Air Consumption	2.5 CFM
	Air Pressure	90 PSI
	Net Weight	1.1 kg
	*PACKING	25PCS/CTN/25kg/26kg/1.1'



YU-10MA Twin Hammer

	Bolt Capacity	8-12 mm
	Max Torque	40-130 N.m.
	Free Speed	8500 R.P.M.
	Overall Length	200 mm
	Air Consumption	2.5 CFM
	Air Pressure	90 PSI
	Net Weight	1.1 kg
	*PACKING	25PCS/CTN/25kg/26kg/1.1'




YU-SR201T

Twin Hammer

YU-201T

(3/8" IMPACT WRENCH)

	Bolt Capacity	10-12 mm
	Max Torque	40-130 N.m.
	Free Speed	8500 R.P.M.
	Overall Length	185 mm
	Air Consumption	3.1 CFM
	Air Pressure	90 PSI
	Net Weight	1.2 kg
*PACKING		10PCS/CTN/15kg/16kg/1.1'



YU-201T

YU-SR202T

Double Hammer

YU-202T

(3/8" IMPACT WRENCH)

	Bolt Capacity	8-10 mm
	Max Torque	50 N.m.
	Free Speed	5000 R.P.M.
	Overall Length	225 mm
	Air Consumption	2.5 CFM
	Air Pressure	90 PSI
	Net Weight	1.3 kg
*PACKING		15PCS/CTN/21kg/22kg/1.1'



YU-202T

YU-SR0941P

Pin Clutch

	Bolt Capacity	1/4" ~1/2" (6-12 mm)
	Max Torque	160 FT-LB (22 KG-M, 216 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.4 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	149 mm
	Net Weight	1.3 kg
	Air Hose	10 mm
*PACKING		10PCS/CTN/13kg/14kg/1'

**YU-SR0903P**

Pin Clutch

	Bolt Capacity	1/4" ~1/2" (6-12 mm)
	Max Torque	165 FT-LB (23 KG-M, 222 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	163 mm
	Net Weight	1.6 kg
	Air Hose	10 mm
*PACKING		10PCS/CTN/16kg/17kg/1'

**YU-SR0905T**

Twin Hammer

	Bolt Capacity	1/4" ~1/2" (6-12mm)
	Max Torque	200 FT-LB (28 KG-M, 270 N-M)
	Free Speed	10000 R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90 PSI
	Overall Length	149 mm
	Net Weight	1.7 kg
	Air Hose	10 mm
*PACKING		10PCS/CTN/17kg/18kg/1'

**YU-SR0980T**

Twin Hammer

	Bolt Capacity	1/4"~1/2" (6-12mm)
	Max Torque	200 FT-LB (28 KG-M, 270 N-M)
	Free Speed	10000R.P.M.
	Air Consumption	3.7 CFM
	Air Inlet	1/4"
	Air Pressure	90PSI
	Overall Length	172mm
	Net Weight	1.2kg
	Air Hose	10mm
*PACKING		10PCS/CTN/12kg/13kg/1'



YU-SR205

1/4" Straight ADJ. Air Screw Driver



	Max Torque	20-115 In-lbs
	Free Speed	1800 R.P.M.
	Overall Length	265 mm
	Air Consumption	5.0 CFM
	Air Pressure	90 PSI
	Net Weight	1.16 kgs
	*PACKING	10 PCS/CTN/13kg/14kg/0.6'

YU-SR206

1/4" Straight ADJ. Air Screw Driver



	Max Torque	20-145 In-lbs
	Free Speed	700 R.P.M.
	Overall Length	140 mm
	Air Consumption	5.0 CFM
	Air Pressure	90 PSI
	Net Weight	1.16 kgs
	*PACKING	10 PCS/CTN/13kg/14kg/0.6'

YU-SR207

1/4" Pistol ADJ. Air Screw Driver



	Max Torque	20-115 IN-LB
	Free Speed	1800 R.P.M.
	Overall Length	215 mm
	Air Consumption	5.0 CFM
	Air Pressure	90 PSI
	Net Weight	1.23 kgs
	*PACKING	10 PCS/CTN/15kg/16kg/1'

YU-SR208

1/4" Pistol ADJ. Air Screw Driver



	Max Torque	45-145 IN-LB
	Free Speed	700 R.P.M.
	Overall Length	220 mm
	Air Consumption	7.5 CFM
	Air Pressure	90 PSI
	Net Weight	1.23 kgs
	*PACKING	10 PCS/CTN/15kg/16kg/1'

Air Auto Shut-Off Clutch Screw Driver

YU-SR401

- For Industrial Maintenance and Production
- With 1 inlet
- Composite Motor Housing



	Torque Range	12-75 kgf-cm
	Free Speed	1000 R.P.M.
	Air Consumption	6 kg/cm ²
	Air Pressure	9.16 L/S
	Net Weight	+/- 3 %
	Repeatability	0.98 kg

YU-SR402

- For Super Industrial Use
- With 3 Air Inlets, it can be used in vertical
- Aluminum Motor Housing
- Excellent Accuracy for various applications and easy torque adjustment
- Oil free for better performance & durability
- Machine capability index > 2.2@±10% (According to ISO5393)
- Machine capability testing according to VDI2647
- Drive Available: 1/4" Hex · 1/4" SQ · 3/8" SQ



	Torque Range	12-75 kgf-cm
	Free Speed	1000 R.P.M.
	Air Consumption	6 kg/cm ²
	Air Pressure	6 L/S
	Net Weight	+/- 3 %
	Repeatability	1.03 kg

YU-DR301

3/8" Air Drill
With Handle Supporter

Drilling Cap	3/8"
Free Speed	3000 R.P.M.
Air Pressure	90 PSI
Overall Length	7" (180mm)
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	6.0 CFM
Net Weight	0.9 kg
Air Compressor	2 HP
*PACKING	20PCS/CTN/20kg/21kg/1.4'



OPTION: Key Less Chuck

YU-DR301KL: 3/8" Air Drill with Key Less Chuck

YU-DR401

1/2" Air Drill
With Handle Supporter

Drilling Cap	1/2"
Free Speed	800 R.P.M.
Air Pressure	90 PSI
Overall Length	8" (203mm)
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	8.0 CFM
Net Weight	1.6 kg
Air Compressor	2 HP
*PACKING	10PCS/CTN/18kg/19kg/0.7'



OPTION: Key Less Chuck

YU-DR401KL: 1/2" Air Drill with Key Less Chuck

YU-DR302

3/8" Reversible Air Drill
With Handle Supporter

Drilling Cap	3/8"
Free Speed	1800 R.P.M.
Air Pressure	90 PSI
Overall Length	7" (180mm)
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	6.0 CFM
Net Weight	1.1 kg
Air Compressor	2 HP
*PACKING	20PCS/CTN/24kg/25kg/1.4'



OPTION: Key Less Chuck

YU-DR302KL: 3/8" Reversible Air Drill with Key Less Chuck

YU-DR402

1/2" Reversible Air Drill
With Handle Supporter

Drilling Cap	1/2"
Free Speed	800 R.P.M.
Air Pressure	90 PSI
Overall Length	8" (203 mm)
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	8.0 CFM
Net Weight	1.6 kg
Air Compressor	2 HP
*PACKING	10PCS/CTN/18kg/19kg/0.7'



OPTION: Key Less Chuck

YU-DR402KL: 1/2" Reversible Air Drill with Key Less Chuck

YU-DR217

3/8" Air Angle Drill

Drilling cap	3/8"
Free speed	1900 R.P.M.
Overall Length	190 mm
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	9.9 CFM
Net Weight	0.96 kg
Air Compressor	2 HP
*PACKING	20PCS/CTN/20kg/21kg/1.2'

**YU-DR218**


3/8" Air Angle Reversible Drill

Drilling Cap	3/8"
Free Speed	1800 R.P.M.
Overall Length	210 mm
Air Inlet	1/4"
Air Hose	3/8" (10mm)
Air Consumption	10.6 CFM
Net Weight	1.1 kg
Air Compressor	2 HP
*PACKING	10PCS/CTN/13kg/14kg/0.8'

**YU-DR219**

Air Spot Drill

Bit Size	6.5 or 8 mm
Free speed	1800 R.P.M.
Air Pressure	90 PSI
Overall Length	200 mm
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	4.5 CFM
Net Weight	1.6 kg
*PACKING	10PC/CTN/15 kg/16 kg/1.4'

**YU-DR303**

3/8" Air Straight Drill (3-Gear)

Drilling cap	3/8"
Free speed	2500 R.P.M.
Air Pressure	90 PSI
Overall Length	230 mm
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Consumption	4.5 CFM
Net Weight	1 kg
*PACKING	20PC/CTN/19 kg/20 kg/1'





YU-GR1101H

1/4" H.D. DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	28000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	160 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.37 kg
*PACKING	20PCS/CTN/7.4kg 8.4kg/0.55'



YU-GR1106H

1/4" H.D. 90° ANGLE DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	20000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	160 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.49 kg
*PACKING	20PCS/CTN/9.8kg 10.8kg/0.65'



YU-GR1108H

90° 2" H.D. ANGLE ORBITAL SANDER
(0.3 HP, REAR EXHAUST)

Free Speed	15000 R.P.M.
Overall Length	147 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.62 kg
Pad Size	2"
*PACKING	20PCS/CTN 12.5kg/13.5kg/1.5'



YU-GR1102H

1" EXTENDED DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	28000 R.P.M.
Collet Size	1/4" or 6mm
Overall Length	190 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.49 kg
*PACKING	20PCS/CTN/9.8kg 10.8kg/0.85'



YU-GR1059H

105° ANGLE DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	15000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	175 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.56 kg
*PACKING	20PCS/CTN/10.5kg 11.5kg/0.65'

YU-GR1101HK

36 PCS DIE GRINDER TOOL KIT

Contents:

1 PC	YU-GR1101H (collet size :1/4" or 6mm)
1 PC	Collet (1/8" or 3mm)
5 PC	Shank Stone (1/8" or 3mm)
5 PC	Shank Stone (1/4" or 6mm)
2 PC	Spanner
1 PC	Nipple
4 PC	Sanding Drum (1", 3/4", 1/2", 3/8")
16 PC	Abrasive sleeve
	1", 3/4" 1/2", 3/8" (4 pcs of each size)
1 PC	Blow case

*PACKING 10PCS/CTN/12 kgs/13 kgs/0.9'



YU-GR1103H

3" EXTENDED DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	28000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	235 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.55 kg
*PACKING	20PCS/CTN/11kg 12kg/0.85'



YU-GR1154H

90° 2" H.D. ANGLE SANDER
(0.3 HP, REAR EXHAUST)

Free Speed	15000 R.P.M.
Overall Length	141 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.48 kg
Pad Size	2"
*PACKING	20PCS/CTN 10kg/11kg/0.65'



YU-GR9001

DIE GRINDER
(0.9 HP, REAR EXHAUST)

Free Speed	18000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	185 mm
Air Inlet	1/4"
Air Consumption	3.8 CFM
Net Weight	0.71 kg
*PACKING	20PCS/CTN 14.2kg/15.2kg/0.8'



YU-GR1104H

5" EXTENDED DIE GRINDER
(0.3 HP, REAR EXHAUST)

Free Speed	28000 R.P.M.
Collet Size	1/4" or 6mm
Overall Length	285 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.66 kg
*PACKING	20PCS/CTN/13.2kg 14.2kg/0.85'



YU-GR1054H

105° 2" H.D. ANGLE SANDER
(0.3 HP, REAR EXHAUST)

Free Speed	15000 R.P.M.
Overall Length	175 mm
Air Inlet	1/4"
Air Consumption	3.5 CFM
Net Weight	0.48 kg
Pad Size	2"
*PACKING	20PCS/CTN 11.2kg/12.2kg/0.65'



YU-GR9055

105° ANGLE GRINDER
(0.9 HP, REAR EXHAUST)

Free Speed	9000 R.P.M.
Overall Length	170 mm
Air Inlet	1/4"
Air Consumption	3.8 CFM
Net Weight	1.16 kg
Pad Size	4" Grinding Wheel
*PACKING	10PCS/CTN 12kg/13kg/0.9'

**YU-GR2200**

Low Noise Air Die Grinder

Free Speed	22000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	178 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.6 kg
*Packing	12PCS/CTN/9kg/9.8kg/0.8'

**YU-GR2203**

Low Noise 3" Air Extension Die Grinder

Free Speed	22000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	240 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/12kg/13kg/1.1'

**YU-GR2205**

Low Noise 5" Air Extension Die Grinder

Free Speed	22000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	280 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/12kg/13kg/1.1'

**YU-GR2210**

Low Noise 90° Air Angle Die Grinder

Free Speed	18000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	178 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/11kg/12kg/0.8'

**YU-GR2231**

Low Noise 90° 2" Air Angle Sander

Free Speed	15000 R.P.M.
Collet Size	2" included, also available for 3"
Overall Length	178 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/10.3kg/11.3kg/0.8'

**YU-GR2115**

Low Noise 115° Air Angle Die Grinder

Free Speed	18000 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	178 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/10.8kg/11.8kg/0.8'

**YU-GR2230**

Low Noise 2" Air Angle Grinder

Free Speed	15000 R.P.M.
Grinding Wheel	2"
Overall Length	178 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/11.5kg/12.4kg/1.5'

**YU-GR2245A**

Low Speed, Low Noise Air Die Grinder

Free Speed	2600 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	200 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/11.5kg/12.1kg/1.1'

**YU-GR2265A**

Low Speed, Low Noise Air Die Grinder

Free Speed	3600 R.P.M.
Collet Size	1/4" or 6 mm
Overall Length	200 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.7 kg
*Packing	12PCS/CTN/11.5kg/12.1kg/1.1'

YU-SD2226

Angle Sander / Polisher

Free Speed	1800 R.P.M.
Spindle Thread	5/16" -24UNF
Air Pressure	90 PSI
Overall Length	200 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.4 CFM
Net Weight	1.0 kg
*Packing	12PCS/13.7kg/14.4kg/0.96'



* Sanding pad , polishing pad , wool wheel are not included , it is available for below selection of purchasing.

Sanding Pad Hook-up(3-Hole) ,
Velcro type 3" : SD2226-03SSanding Pad Hook-up(no-Hole) ,
Vinyl type 5" : SD2226-05SWool Wheel
3" : SD2226-03W
5" : SD2226-05WCoarse Polishing Pad
3" : SD2226-03P
5" : SD2226-05P



YU-DR2245KL

Keyless, Low Noise 3/8" Air Drill

Chuck Size	3/8" or 10 mm
Free Speed	2,600 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/11.5kg/12.1kg/1.1'



YU-DR2265KL

Keyless, Low Noise 3/8" Air Drill

Chuck Size	3/8" or 10 mm
Free Speed	3600 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/11.5kg/12.1kg/1.1'



YU-DR2245

Low Noise 3/8" Air Drill

Chuck Size	3/8" or 10 mm
Free Speed	2600 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/13kg/14kg/1.1'



YU-DR2265

Low Noise 3/8" Air Drill

Chuck Size	3/8" or 10 mm
Free Speed	3600 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/13kg/14kg/1.1'



YU-DR2225

Low Noise 3/8" 90° Angle Air Drill

Chuck Size	3/8" or 10 mm
Free Speed	1800 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	195 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.9 kg
*Packing	12PCS/CTN/14.8kg/15.4kg/0.8'



YU-DR304KL

Keyless, 3/8" Air Reversible Drill

Drilling Cap	3/8"
Free Speed	1800 R.P.M.
Air Pressure	90 PSI
Overall Length	195mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Net Weight	0.9KG
*PACKING	10PCS/10.2/10.8/0.78'



YU-DR403KL

Keyless, 1/2" Air Reversible Drill

Drilling Cap	1/2"
Free Speed	700 R.P.M.
Air Pressure	90 PSI
Overall Length	260mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Net Weight	1.2KG
*PACKING	10PCS/14.5/15.5/0.96'



YU-DR404KL

Keyless, 1/2" Air Reversible Drill

Drilling Cap	1/2"
Free Speed	450 R.P.M.
Air Pressure	90 PSI
Overall Length	230mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Net Weight	1.2KG
*PACKING	10PCS/14.6/15.5/0.96'

**YU-ER2260**

Low Noise Air Eraser

Free Speed	2600 R.P.M.
Spindle Thread	5/16" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/12kg/13kg/1.1'

**YU-ER2603**

Low Noise Air Eraser

Free Speed	3600 R.P.M.
Spindle Thread	5/16" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/12kg/13kg/1.1'

**YU-NB2350**

Low Noise Air Nibbler

Free Speed	2600 R.P.M.
Cutting Capacity	Steel 1.2mm Aluminum 1.6mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	1.0 kg
*Packing	12PCS/CTN/13kg/14kg/0.8'

**YU-MS2300**

Low Noise Air Metal Shear

Free Speed	2600 R.P.M.
Cutting Capacity	Steel 1.2mm Aluminum 1.6mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	1.0 kg
*Packing	12PCS/CTN/15kg/16kg/1.1'

**YU-MS2310**

Low Noise Air Scissors

Free Speed	2600 R.P.M.
Cutting Capacity	Steel 1.2mm Aluminum 1.6mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	1.0 kg
*Packing	12PCS/CTN/15kg/16kg/1.1'

**YU-TB2270**

Low Noise Air Tire Buffer

Free Speed	2600 R.P.M.
Spindle Thread	3/8" - 24UNF
Overall Length	225 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/11.6kg/12.6kg/1.1'

**YU-CT2250**

Low Noise Air Cutter

Free Speed	21000 R.P.M.
Cutting Wheel	3"
Overall Length	193 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.1 CFM
Net Weight	0.8 kg
*Packing	12PCS/CTN/12kg/13kg/1.5'

**YU-GR2255 (13,000 RPM)**

4" Reversible Air Axial Grinder

YU-CT2255 (15,000 RPM)

4" Reversible Air Axial Cutter

Free Speed	13000 / 15,000 R.P.M.
Overall Length	234 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.6 CFM
Net Weight	1.5 kg
Grinding / Cutting Wheel	4"
*PACKING	12PCS/CTN/18kg/19kg/2'

**YU-CT2254 (15,000 RPM)**

4" Extended Reversible Air Axial Cutter

Free Speed	15000 R.P.M.
Overall Length	376 mm
Air Inlet	1/4"
Air Hose	3/8"(10 mm)
Air Consumption	3.6 CFM
Net Weight	1.1 kg
Cutting Wheel	4"
*PACKING	12PCS/CTN/20.5kg/21.5kg/2'

YU-BW001

Air Body Saw

Blows per minute	8000-10000 S.P.M.
Strokes Length	10 mm
Capacity Cutting Size	Steel: 1.6 mm
Air Inlet	1/4"
Air Pressure	90 PSI
Air Consumption	2 CFM
Overall Length	230mm
Net Weight	0.65 kgs
*PACKING	20PCS/CTN/13kg/14kg/1'

Included:

Metal Saw Blade: 24T, 32T each pc.
2mm Hex Wrench, 4 mm Hex Wrench each pc.

- Low Vibration
- Light Weight
- Low Noise

YU-BW003

Low Vibration Air Body Saw

Blows per minute	12000 S.P.M.
Strokes Length	10 mm
Max Vibration:	3 m/s ²
Air Inlet	1/4"
Air Pressure	90 PSI
Air Consumption	1.7 CFM
Overall Length	147mm
Net Weight	0.4 kgs
*PACKING	25PCS/CTN/14kg/15kg/1.2'

YU-BW005

Air Body Saw & File

Handle Diameter	29 x 29 mm
Avg. Air Cons.	0.2 M3/min (7.1 CFM)
Air Pressure	90 PSI
Stroke	5 mm
Stroke Speed	3500 S.P.M.
Cutting Capacity (Iron Plate)	1 mm Iron: 500 mm/min
Saw Blade:	32 teeth/inch
File	9.2 X 2.6mm,5.1mm,6.2mm
Overall Length	160 mm
Net Weight	0.38 kg
*PACKING	20PCS/CTN/15kg/16kg/2'

YU-MS001

Air Metal Shear

Free Speed	2500 R.P.M.
Cutting Capacity	Steel: 1.2 mm Aluminum: 1.4mm
Air Inlet	1/4"
Air Pressure	90 PSI
Air Consumption	4.5 CFM
Overall Length	230 mm
Net Weight	1.1 kgs
*PACKING	20 PCS/CTN/22kg/23kg/1'

- Low Vibration
- Light Weight
- Low Noise

YU-BW002

Low Vibration Air Body Saw

Blows per minute	9500 S.P.M.
Strokes Length	10 mm
Air Inlet	1/4"
Air Pressure	90 PSI
Air Consumption	3 CFM
Overall Length	260 mm
Air Hose	3/8"
Vibration	3.7 m/s ²
Net Weight	0.51kgs
*PACKING	20PCS/CTN/16kg/16.6kg/1.4'

Included:

Metal Saw Blade: 18T, 24T, 32T each pc.
3mm Hex Wrench: 1 pc.
Patented Universal Swivel Air Inlet Joint: 1 pc.

- Low Vibration
- Light Weight
- Low Noise

YU-BW004

Low Vibration Air Body Saw

Blows per minute	10000 S.P.M.
Strokes Length	14.5 mm
Max Vibration:	4.5 m/s ²
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	217 mm
Net Weight	0.6 kgs
*PACKING	20PCS/CTN/13kg/14kg/1.1'

YU-CT001

3" Air Cut-Off Tool (0.9 HP, REAR EXHAUST)

Cutting Wheel	3"
Free Speed	20000 R.P.M
Air Consumption	5 CFM
Air Pressure	90 PSI
	1/4"
Hose Size	3/8"
Overall Length	190 mm
Net Weight	0.8 Kgs
*PACKING	20 PCS/CTN/16kg/17kg/1.5"

YU-MS002

Air Metal Shear

Free Speed	2200 R.P.M.
Cutting Capacity	Steel: 1.2 mm Aluminum: 1.4 mm
Air Inlet	1/4"
Air Pressure	90 PSI
Air Consumption	4.5 CFM
Overall Length	240 mm
Net Weight	1.1 kgs
*PACKING	10 PCS/CTN/11.8kg/12.8kg/0.8'

YU-MG023

Air Micro Die Grinder

**YU-MG023K**

Air Micro Die Grinder with plastic case

Max Free Speed	23000 R.P.M.
Collet Size	30 mm
Length	160 mm
Net Weight	0.3 kg
Air Inlet	1/4"
Air Hose Size	5 mm
Air Consumption	7 CFM
Air Pressure	90 PSI
*PACKING	20 PCS/CTN/10.5kg/11kg/0.9' (YU-MG023K) 20PCS/CTN/19kg/20kg/2.65'

YU-MG070


Air Micro Die Grinder



Max Free Speed	70000 R.P.M.
Collet Size	3/32", 1/8" or 3 mm
Length	156 mm
Net Weight	0.21 kg
Air Inlet	1/4"
Air Hose Size	5 mm
Air Consumption	7 CFM
Air Pressure	90 PSI
*PACKING	20PCS/CTN/6.6kg/7kg/1.1'

YU-MG035

Air Micro Die Grinder



Max Free Speed	35000 R.P.M.
Collet Size	3 mm, 6mm or 1/8", 1/4"
Length	175mm
Net Weight	0.35 kg
Air Inlet	1/4"
Air Hose Size	5 mm
Air Consumption	8.83 CFM
Air Pressure	90 PSI
*PACKING	20PCS/CTN/10kg/10.5kg/0.9'

YU-MP2

Engraving Pen



Air Inlet	1/4"
Air Consumption	2 CFM
Blows Per Min	13000 B.P.M
Overall Length	155mm
Air Pressure	90 PSI
Net Weight	0.22 KGS
*PACKING	24 PCS/CTN/7.5kg/8.3kg/1.1'

YU-MG056

Air Micro Die Grinder



Max Free Speed	56000 R.P.M.
Collet Size	3/32", 1/8" or 3 mm
Length	156 mm
Net Weight	0.21 kg
Air Inlet	1/4"
Air Hose Size	5 mm
Air Consumption	7 CFM
Air Pressure	90 PSI
*PACKING	20PCS/CTN/6.6kg/7kg/1.1'

YU-MG056K**YU-MG070K**Air Micro Die Grinder
with plastic case

Contents:	
1PC	YU-MG056 or YU-MG070
10PCS	Grinding Stone: 3,4,5,6,7,8 mm 3*3,3*6,13*4T,16*4T
1PC	Oil Pot
2PC	9mm Spanner
1PC	Nipple
1PC	Mini Oilier
1PC	Plastic Case
PACKING	20 Sets/CTN/18kgs/19kgs /2.65'

YU-MG035H

Air Micro Drill



Max Free Speed	30000 R.P.M
Drilling Cap	0.5-4mm
Length	175 mm
Net Weight	0.35 kg
Air Inlet	1/4"
Air Hose Size	5 mm
Air Consumption	8.83 CFM
Air Pressuer	90 PSI
*PACKING	20PCS/CTN/10kg/10.5kg/0.9'

YU-ES110

Engraving Pen



Air Inlet	1/4"
Air Consumption	2 CFM
Blows Per Min	30000 B.P.M
Overall Length	160mm
Air Pressure	90 PSI
Net Weight	0.24 KGS
*PACKING	20 PCS/CTN/4.8kg/7.0kg/1.74'



Enjoy Scorpio's Most Valued and Innovative Products



High Power
Light Weight
Lower Air Consumption
Energy Saving for Green Living World





Grip lever

YU-GR406

4" Angle Grinder (Safety lever)

YU-GR406R

4" Angle Roll Grinder (Grip lever)

Free Speed	11000 R.P.M.
Air Consumption	6 CFM
Air Inlet	1/4"
Air Hose	10 mm (3/8")
Air Pressure	90 PSI
Net Weight	1.82 kg
*PACKING	12PCS/25kgs/26kgs/2.08'



Grip lever

YU-GR506

5" Angle Grinder (Safety lever)

YU-GR506R

5" Angle Grinder (Grip lever)

Free Speed	11000 R.P.M.
Air Consumption	6 CFM
Air Inlet	1/4"
Air Hose	10 mm (3/8")
Air Pressure	90 PSI
Net Weight	1.9 kg
*PACKING	12PCS/25kgs/26kgs/2.08'

**YU-GR706**

7" Angle Grinder (Safety lever)

Free Speed	7000 R.P.M.
Wheel size	7"
Air Consumption	9 CFM
Air Inlet	3/8"
Air Hose	13 mm(1/2")
Air Pressure	90PSI
Net Weight	3.18 kg
*PACKING	6PCS/CTN/18kg/22.5kg/2.32'

**YU-VSD701** 7" Vertical Sander**YU-GR701(P)** 7" Vertical Polisher

Free Speed	4500 R.P.M.(Sander) / 2300 R.P.M.(Polisher)
Spindle Thread	5/8" - 11
Air Consumption	6 CFM
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Air Pressure	90 PSI
Net Weight	2 kg
*PACKING	8PCS/CTN/21.6kg/22.3kg/1.2'

**YU-GR702**

7" Heavy Duty Air Vertical Grinder

Free Speed	7000 R.P.M.
Spindle Thread	5/8" - 11
Air Consumption	0.46 m ³ /min
Air Inlet	1/2"
Air Hose	1/2"(13mm)
Air Pressure	90 PSI
Net Weight	4.2 kg
*PACKING	4PCS/CTN/20kg/21kg/2.1'

**YU-GR902**

9" Heavy Duty Air Vertical Grinder

Free Speed	6000 R.P.M.
Spindle Thread	5/8" - 11
Air Consumption	0.46 m ³ /min
Air Inlet	1/2"
Air Hose	1/2"(13mm)
Air Pressure	90 PSI
Net Weight	4.4 kg
*PACKING	4PCS/CTN/23.5kg/24.5kg/2.9'

**YU-GR907(S)**

7" Angle Sander (Safety lever)

YU-GR907(P)

7" Angle Polisher (Safety lever)

YU-GR907(PA)7" Angle Polisher (Safety lever)
With Wool Polishing Pad

Free Speed	4500 R.P.M.(Sander) / 2500 R.P.M.(Polisher)
Air Consumption	12 CFM
Air Inlet	1/4"
Air Hose	3/8"(10mm)
Spindle Thread Size	5/8"-11THD
Pad Size	7"
Sound Level	85 dB(A)
Air Pressure	90 PSI
Overall Length	406 mm (16")
Net Weight	2.9 kg
*PACKING	6PCS/CTN/15.2kg/16.2kg/1.75'

**YU-GR903**


9" Heavy Duty Air Vertical Grinder

Free Speed	5600 R.P.M.
Spindle Thread	5/8" - 11
Air Consumption	0.76 m ³ /min
Air Inlet	1/2"
Air Hose	1/2"(13mm)
Air Pressure	90 PSI
Net Weight	4.97 kgs
*PACKING	4PCS/CTN/26kg/28kg/2.9'

Oil-Free Random Orbital Sander

Double-Air-Intake Series

39

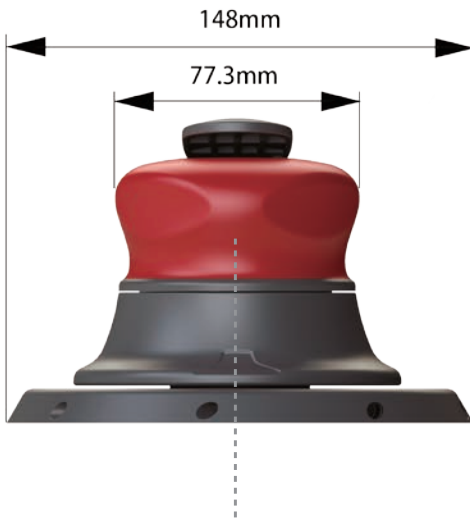

Low Vibration & High Power


Given by Double-Air-Intake Mechanism, increase work efficiency.

Oil-Free Motor

Available for long-time operation.

High Hardness & High Wear-Resistance Cylinder

With upgraded design, special surface treatment, give the cylinder supreme wear-resistance and longer service-life.

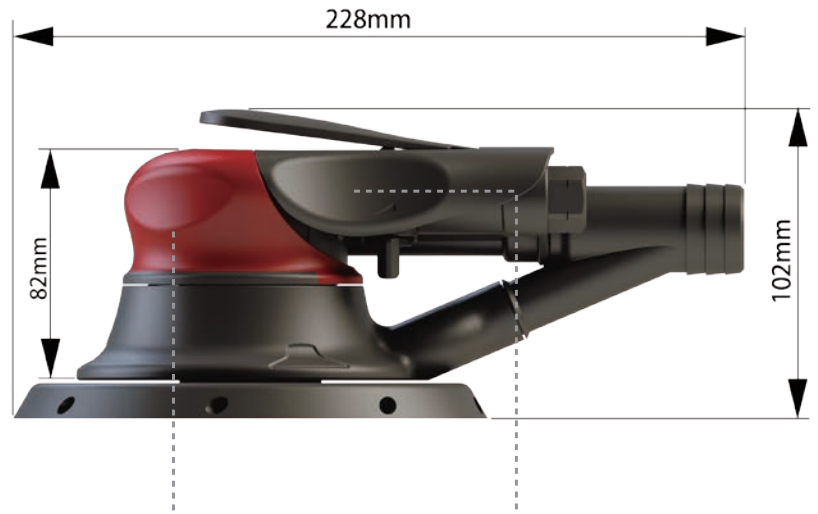

Comfortable Operation


Only 82mm height, Low center of gravity design, greatly increase operational comfort.

Ergonomic Handle

Greatly reduce hand-gripping fatigue

Easy Maintenance

Bearings are separated

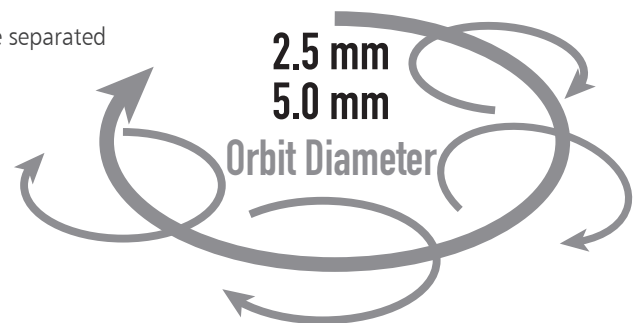

Model No. (YU-)	SD405D	SD406D	SD405N	SD406N	SD405C	SD406C
Type	Self-Generated Vacuum		Non-Vacuum		Central Vacuum	
Orbit Diameter	2.5 mm	5.0 mm	2.5 mm	5.0 mm	2.5 mm	5.0 mm
Vibration	5.9 m/sec ²	5.9 m/sec ²	5.7 m/sec ²	5.7 m/sec ²	5.9 m/sec ²	5.9 m/sec ²
Noise Level	83 dB(A)	80.3 dB(A)	81 dB(A)	81.3 dB(A)	83 dB(A)	80.3 dB(A)
Free Speed	10000 RPM		10000 RPM		10000 RPM	
Pad Dimeter	5" or 6" Velcro type		5" or 6" Velcro type		5" or 6" Velcro type	
Net Weight	0.9 kg		0.9 kg		0.9 kg	
Air Pressure	90 PSI		90 PSI		90 PSI	
Air Inlet	1/4"		1/4"		1/4"	
Hose Size	3/8"(10mm)		3/8"(10mm)		3/8"(10mm)	
Air Consumption	3.1 CFM		3.1 CFM		3.1 CFM	

**YU-SD101D** Dust Free Dual Action Sander**YU-SD101N** Dual Action Sander

Free Speed	11000 R.P.M
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Net Weight	0.9 kg
Air Pressure	90 PSI
Pad Size	5" or "6 velcro type
Vibration	0.8 m/s ²
Orbit Diameter	5 mm
*PACKING	5":6PCS/CTN/8.5kg/9.5kg/2' 6":6PCS/CTN/8.5kg/9.5kg/2'

**YU-SD305D** Dust Free Dual Action Sander**YU-SD305N** Dual Action Sander

Free Speed	10000 R.P.M.
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.3m ³ / min (10.6 CFM)
Net Weight	1kg
Air Pressure	90PSI
Pad Size	5" or 6" Velcro type
Orbit Diameter	5mm
*PACKING	YU-SD305D:10PCS/CTN/19kg/20kg/3.1' YU-SD305N:10PCS/CTN/17.5kg/18.5kg/2.4'

**YU-SD204D** DUST FREE ORBITAL SANDER**YU-SD204N** ORBITAL SANDER

Free Speed	8000R.P.M.
Overall Length	294mm
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.4m ³ / min (14.1 CFM)
Net Weight	2.1kg
Air Pressure	90PSI
Pad Size	93*176mm, Velcro or clipper type
Orbit Diameter	5mm
*PACKING	6PCS/CTN/17kg/18kg/2'

**YU-BS003**

Air Belt Sander (10 X 330mm)

Free Speed	16500 R.P.M
Size of Belt	10X330mm
Air Consumption	4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	326mm
Net Weight	0.88KG
*PACKING	10PCS/10kg/11kg/1.4'

**YU-SD303D** Dust Free Dual Action Sander**YU-SD303N** Dual Action Sander

Free Speed	10000 R.P.M
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.34m ³ / min (12 CFM)
Net Weight	0.9 kg
Air Pressure	90 PSI
Pad Size	5" or "6 velcro type
Pad Weight	100g(5"), 120g(6")
Orbit Diameter	5 mm
*PACKING	5":12PCS/CTN/19.5kg/20.5kg/2.2' 6":12PCS/CTN/21.5kg/22.5kg/2.3'

**YU-SD309D** Dust Free Dual Action Sander**YU-SD309N** Dual Action Sander

Free Speed	11000 R.P.M.
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.3m ³ / min (10.6 CFM)
Net Weight	0.78kg
Air Pressure	90PSI
Pad Size	5" or 6" Velcro type
Pad Weight	100g(5"), 120g(6")
Orbit Diameter	5mm
*PACKING	YU-SD309D:10PCS/CTN/19kg/20kg/3.1' YU-SD309N:10PCS/CTN/17.5kg/18.5kg/2.4'

**YU-SD205D** Dust Free Orbital Sander**YU-SD205N** Orbital Sander

Free Speed	7000R.P.M.
Overall Length	300mm
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.4m ³ / min (14.1 CFM)
Net Weight	2.2kg
Air Pressure	90PSI
Pad Size	112*220mm, Velcro or clipper type
Orbit Diameter	5mm
*PACKING	6PCS/CTN/17kg/18kg/2'

**YU-BS004**

Air Belt Sander (20 X 520mm)

Free Speed	16500 R.P.M
Size of Belt	20X520mm
Air Consumption	4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	407mm
Net Weight	1.33KG
*PACKING	10PCS/14kg/15kg/2'

**YU-SD325D** Dust Free Dual Action Sander**YU-SD325N** Dual Action Sander

Free Speed	12000 R.P.M.
Overall Length	233 mm
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.3 m ³ / min (10.6 CFM)
Net Weight	0.96kg
Air Pressure	90PSI
Pad Size	5" x mm
Orbit Diameter	5 mm
*Packing	12PCS/CTN/19kg/20kg/3.1'

**YU-SD203D**

Dust Free Dual Action Sander

Free Speed	10000 R.P.M.
Overall Length	284mm
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	0.4m ³ / min (14.1 CFM)
Net Weight	1.9kg
Air Pressure	90PSI
Pad Size	5" or 6" Velcro type
Pad Weight	100g(5"), 120g (6")
Orbit Diameter	10mm
*PACKING	6PCS/CTN/17kg/18kg/2'

**YU-BS001**

Air Belt Sander (10 X 330mm)

Free Speed	17000 R.P.M.
Size of Belt	10 X 330 mm
Air Consumption	4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	290 mm
Net Weight	0.8 kgs
*PACKING	20 pcs/CTN/ 18 kgs/19 kgs/1.4'

**YU-BS002**

Air Belt Sander (20 X 520mm)

Free Speed	16000 R.P.M.
Size of Belt	20 X 520 mm
Air Consumption	4 CFM
Air Inlet	1/4"
Air Pressure	90 PSI
Overall Length	360 mm
Net Weight	1.2 kgs
*PACKING	10 pcs/CTN/14 kgs/15 kgs/1.4'



YU-SD380
3" Dual Action Sander

Free Speed	15000 R.P.M.
Overall Length	178 mm
Air Inlet	1/4"
Air Consumption	0.4 m ³ /min (14.1 CFM)
Net Weight	0.74 kg
Air Pressure	90PSI
Pad Size	3"
Orbit Diameter	3 mm
*PACKING	20PCS/CTN/19kg/20kg/1.24'



YU-SD381
3" Angle Polisher & Grinder

Free Speed	2500 R.P.M.
Overall Length	110 mm
Air Inlet	1/4"
Air Consumption	0.4 m ³ /min (14.1 CFM)
Net Weight	0.81 kg
Air Pressure	90PSI
Pad Size	3"
*PACKING	20PCS/CTN/19kg/20kg/1.24'



YU-SD382
3" High Speed Sander & Grinder

Free Speed	15000 R.P.M.
Overall Length	190 mm
Air Inlet	1/4"
Air Consumption	0.4 m ³ /min (14.1 CFM)
Net Weight	0.65 kg
Air Pressure	90PSI
Pad Size	3"
*PACKING	20PCS/CTN/19kg/20kg/1.24'



YU-SD383
Finger Sander

Free Speed	13000 R.P.M.
Overall Length	200 mm
Air Inlet	1/4"
Air Consumption	0.4 m ³ /min (14.1 CFM)
Net Weight	0.82 kg
Air Pressure	90PSI
Orbit Diameter	3 mm
*PACKING	20PCS/CTN/19kg/20kg/1.24'



YU-SD384
Mini Orbital Sander

Free Speed	9000 R.P.M.
Overall Length	150 mm
Air Inlet	1/4"
Hose Size	3/8"(10mm)
Air Consumption	0.26 m ³ /min (9.2 CFM)
Net Weight	0.76 kg
Air Pressure	90PSI
Pad Size	73 x 98 mm
Orbit Diameter	3 mm
*PACKING	12PCS/CTN/17kg/18kg/1.58'



YU-SD385
Mini Orbital Sander

Free Speed	9000 R.P.M.
Overall Length	163 mm
Air Inlet	1/4"
Hose Size	3/8"(10mm)
Air Consumption	0.26 m ³ /min (9.2 CFM)
Net Weight	0.7 kg
Air Pressure	90PSI
Pad Size	70 x 100 mm
Orbit Diameter	3 mm
*PACKING	12PCS/CTN/17kg/18kg/1.58'



YU-SD386
Mini Orbital Sander

Free Speed	9000 R.P.M.
Overall Length	144 mm
Air Inlet	1/4"
Hose Size	3/8"(10mm)
Air Consumption	0.26 m ³ /min (9.2 CFM)
Net Weight	0.67 kg
Air Pressure	90PSI
Pad Size	110 x 100 mm
Orbit Diameter	3 mm
*PACKING	12PCS/CTN/17kg/18kg/1.58'



YU-SD387
Wet Sander

Free Speed	7000 R.P.M.
Overall Length	192 mm
Air Inlet	1/4"
Hose Size	3/8"(10mm)
Air Consumption	0.26 m ³ /min (9.2 CFM)
Net Weight	0.73 kg
Air Pressure	90PSI
Pad Size	73 x 98 mm
Orbit Diameter	3 mm
*PACKING	12PCS/CTN/17kg/18kg/1.58'



YU-SD326D 3" DUST FREE ACTION SANDER
YU-SD326N 3" DUAL ACTION SANDER

Free Speed	12000 R.P.M.
Air Inlet	1/4"
Hose Size	3/8"(10mm)
Air Consumption	0.3 m ³ /min (10.6 CFM)
Net Weight	0.92 kg
Air Pressure	90 PSI
Pad Size	73 mm (3") velcro type
Orbit Diameter	2.5 mm
*PACKING	YU-SD326D:10PCS/CTN/19kg/20kg/3.1' YU-SD326N:10PCS/CTN/17.5kg/18.5kg/2.4'

Mini Needle Scaler

PATENT
YU-NS010

Mini Size & Handy, One-Hand Operation for Hours.

Needle (Ø1.4x80mm)


13 pcs needle, Ø1.4, 60mm outside length, ensure smoothly work in details.

360° Adjustable Air Exhaust



Speed Regulator

Adjustable for various needs of speed

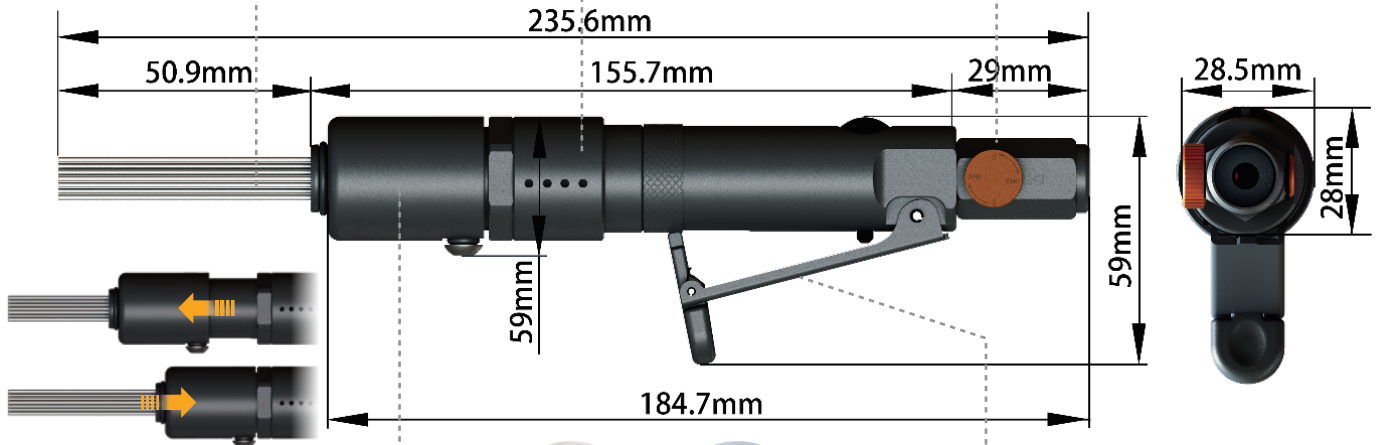

Adjustable Cover



Safety Trigger


Operation workable only if press the handle lever



Clear away rust, debris with bigger area



Wide up debris in narrow space

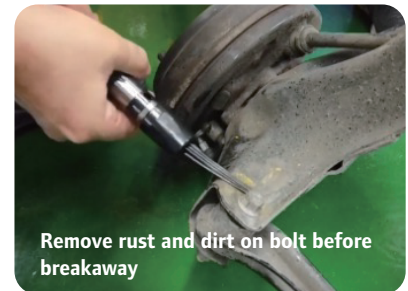

Remove rust and dirt on bolt before breakaway

- For removing rust, paint, impurities, scales... on metals, woods, cement or other hard objects.
- Mini size, straight & handy, easily reach to narrow, confined space, meticulous work piece.
- Low vibrations & low sound pressure benefits to smooth operations.
- It can be held like a pencil for easier handling. Detail of surface cleaning work.
- It can be handle the cleaning work of details more reliably, and will not hurt smaller parts.

Model No.	YU-NS008	YU-NS010 (Adjustable Cover)
Blow Per Min.	3000 B.P.M.	3000 B.P.M.
Piston Stroke	24 mm	24 mm
Number of Needles	13 pcs	13pcs
Air Consumption	1.7 CFM	1.7 CFM
Air Pressure	90 PSI	90 PSI
Air Inlet	1/4"	1/4"
Sound Pressure	89 db(A)	86 db(A)
Overall Length	235.6 mm	235.6 mm
Net Weight	0.48 kg	0.6 kg
Packing	25PCS/CTN/14.6kg/15.6kg/1' (YU-NS008) 25PCS/CTN/17.6kg/18.6kg/1' (YU-NS010)	



YU-NS003

Air Needle Scaler Straight Type

Air Inlet	1/4"
Blows per min.	4600 B.P.M.
Piston Stroke	30 mm
Needle Diameter	3 x 120 mm
Number of Needles	12
Air Pressure	90 PSI
Air Consumption	16 CFM
Overall Length	310 mm
Net Weight	1.19 kgs
*PACKING	10 PC/CTN/14kg/14.5kg/0.7'



YU-NS001

Air Needle Scaler Pistol Type

Air Inlet	1/4"
Blows per min.	4500 B.P.M.
Piston Stroke	36 mm
Needle Diameter	3 x 180 mm
Number of Needles	19
Air Pressure	90 PSI
Air Consumption	4 CFM
Overall Length	370 mm
Net Weight	2.1kgs
*PACKING	5 PC/CTN/9.5kg/10 kg/0.8'



YU-NS004

Air Needle Scaler Straight Type

Air Inlet	1/4"
Blows per min.	3200 B.P.M.
Piston Stroke	32 mm
Needle Diameter	3 x 180 mm
Number of Needles	19
Air Pressure	90 PSI
Air Consumption	3.4 CFM
Overall Length	380 mm
Net Weight	2.6 kgs
*PACKING	6 PC/CTN/15.6kg/16.6kg/0.55'



YU-NS002

Air Needle Scaler Pistol type

Air Inlet	1/4"
Blows per Min.	3200 B.P.M.
Piston Stroke	28 mm
Needle Diameter	3 x 180 mm
Number of Needles	19
Air Pressure	90 PSI
Air Consumption	10 CFM
Overall Length	380 mm
Net Weight	2.6 kgs
*PACKING	5 PC/CTN/14.5kg/15.5kg/0.8'



YU-NS005

Air Needle Scaler Straight Type

Air Inlet	1/4"
Blows per min.	4200 B.P.M.
Piston Stroke	32 mm
Needle Diameter	3 x 180mm
Number of Needles	19
Air Pressure	90 PSI
Air Consumption	3.4 CFM
Overall Length	470 mm
Net Weight	2.6 kgs
*PACKING	6 PC/CTN/16.9kg/18.2kg/0.62'



YU-NS006

Air Needle Scaler Pistol Type

Air Inlet	1/4"
Blows per min.	4000 B.P.M.
Piston Stroke	27
Needle Diameter	3 x 180 mm
Number of Needles	23
Air Pressure	90 PSI
Air Consumption	7 CFM
Overall Length	335 mm
Weight	2.8 kgs
*PACKING	6 PC/CTN/17kg/19kg/1.3'



YU-FC002

Air Flux Chipper

Air Inlet	1/4"
Blows per min.	4200 B.P.M.
Piston Stroke	32 mm
Air Pressure	90 PSI
Air Consumption	8.8 CFM
Overall Length	380 mm
Net Weight	2.5 kgs
*PACKING	6 PC/CTN/12kg/13kg/0.55'



YU-NS007

Air Needle Scaler Pistol Type

Air Inlet	1/4"
Blows per min.	3500 B.P.M.
Piston Stroke	28
Needle Diameter	3 x 180 mm
Number of Needles	28
Air Pressure	90 PSI
Air Consumption	7.4 CFM
Overall Length	350 mm
Net Weight	3.6kgs
*PACKING	6 PC/CTN/22kg/24kg/1.3'



**YU-AH319-R/H**

Composite Vibration-Damped
190mm Air Hammer

Air Inlet	1/4"
Air Consumption	7.8 CFM
Blows per min	3000 B.P.M
Overall Length	215mm
Pistol Stroke	70 mm
Vibration	4.2 m/sec ²
Net Weight	1.9 kgs
*PACKING:	10PCS/CTN/19kg/20kg/1.6'

**YU-AH325-R/H**

Composite Vibration-Damped
250mm Air Hammer

Air Inlet	1/4"
Air Consumption	8.6 CFM
Blows per min	2100 B.P.M.
Overall Length	260mm
Pistol Stroke	95mm
Vibration	2.8m/sec ²
Net Weight	2.4 kgs
*PACKING:	10PCS/CTN/24kg/25kg/1.6'

**YU-AH820-R/H**

Vibration-Damped 210mm
Air Hammer

Air Inlet	1/4"
Air Consumption	8.2 CFM
Blows per min	2500 B.P.M
Overall Length	245mm
Pistol Stroke	75 mm
Vibration	3.5 m/sec ²
Net Weight	2.3 kgs
*PACKING:	6PCS/CTN/14kg/16kg/0.9'

**YU-AH850-R/H**

Vibration-Damped 250mm
Air Hammer

Air Inlet	1/4"
Air Consumption	9 CFM
Blows per min	2100 B.P.M.
Overall Length	280mm
Pistol Stroke	90mm
Vibration	5.8m/sec ²
Net Weight	2.6 kg
*PACKING:	6PCS/CTN/16kg/18kg/1'

**YU-AH250**

Heavy Duty Air Hammer

Air Pressure	90 PSI
Air Consumption	4 CFM
Blows per min	2100 B.P.M
Hose size	3/8"(10mm)
Air Inlet	1/4"
*PACKING:	10/CTN/23kgs/24kgs/1.3'

**YU-AH319K-R/H
YU-AH325K-R/H**

Composite Vibration-Damped
Air Hammer Kit



Contents:	
1 PC	Air Hammer
1 PC	Quick Change Retainer
5 PC	175MM Chisel w/ Round or Hex Shank
1 PC	Spring
1 PC	1/4" Air Nipple
1 PC	Blow Case
Net Weight	3.6 kgs <YU-AH325K> / 3.6 kgs <YU-AH319K>
*PACKING:	5PCS/CTN/16kg/18kg/1.7' <YU-AH325K> 5PCS/CTN/14kg/16kg/1.7' <YU-AH319K>

**YU-AH190K-R/H**

Heavy Duty 190mm
Air Hammer Kit

Air Inlet	1/4"
Pistol Stroke	64 mm
Blows per min	3200 B.P.M
Contents:	
1 PC	YU-AH190 Air Hammer
1 PC	Retainer Spring
5 PC	7" Chisel With Round or Hex Shank
1 PC	Oil Pot
1 PC	Nipple
1 PC	Blow Case
Net Weight	2.6 kgs
*PACKING:	10 PCS/CTN/26 kg /27kg/1.8'

**YU-AH150K-R/H**

Heavy Duty 150mm Air Hammer Kit

Air Inlet	1/4"
Pistol Stroke	41mm
Blows per min	4500 B.P.M.
Overall Length	135mm
Contents:	
1 PC	YU-AH150 Air Hammer
1 PC	Retainer Spring
4 PC	125MM Chisel w/ Round or Hex Shank
Net Weight	0.76 kgs
*PACKING:	1 PC/White box 10 pcs/CTN/ 9.5kg/10.5kg/0.5'



YU-P11-R/H

Mini Chipping Hammer

Air Inlet	1/4"
Air Consumption	7.4 CFM
Blows Per Minute	3000B.P.M.
Overall Length	270mm
Pistol Stroke	56mm
Net Weight	1.6 kgs
*PACKING	10PCS/CTN/20kg/22kg/1.2'



YU-P11K-R/H

Mini Chipping Hammer Kit

1 PC	YU-P11 Mini Chipping Hammer
1 PC	Quick Changer Retainer R-205
1 PC	1/4" Air Nipple
1 PC	Moil Point Chisel
1 PC	20 mm Flat Chisel
1 PC	30 mm Flat Chisel
1 PC	Retainer Spring
1 PC	Retainer Spring Beehive Type
1 PC	Blow Case
Net Weight	4.6 kgs
*PACKING	4Sets/CTN/15ks/17kg/2'



YU-P12-R/H

1" Chipping Hammer

Air Inlet	3/8"
Air Consumption	9.6 CFM
Blows Per Min	2500 B.P.M.
Overall Length	395 mm
Pistol Stroke	60 mm
Net Weight	7 kgs
*PACKING	2PCS/CTN/14.5kg/15.5kg/0.8'



YU-P13-R/H

2" Chipping Hammer

Air Inlet	3/8"
Air Consumption	10.4 CFM
Blows Per Min	2300 B.P.M.
Overall Length	405 mm
Pistol Stroke	74 mm
Net Weight	7.3 kgs
*PACKING	2PCS/CTN/15kg/16kg/0.8'



YU-P14-R/H

3" Chipping Hammer

Air Inlet	3/8"
Air Consumption	12.3 CFM
Blows Per Min	2000 B.P.M.
Overall Length	450 mm
Pistol Stroke	115 mm
Net Weight	8 kgs
*PACKING	2PCS/CTN/16kg/17.5kg/0.9'



YU-P15-R/H

4" Chipping Hammer

Air Inlet	3/8"
Air Consumption	13CFM
Blows Per Min	1600 B.P.M.
Overall Length	470mm
Pistol Stroke	140mm
Net Weight	8.3 kgs
*PACKING	2PCS/CTN/16kg/18kg/0.9'

Retainer Available :



R205-P11

Quick Change retainer for YU-P11



R1-P11

Quick Change retainer for YU-P11



R2-P11

Quick Change retainer for YU-P11



R-3400

Quick Change retainer for YU-P12~P14

■ YU-P12 ~P15 Chisel opening shank -Round (0.68") /Hex (0.58")

■ YU-P11 Chisel Opening Shank -Round (12.7mm)/Hex (12mm)


Powerful hitting power and low reacting force.

It is suitable for destroy the concretes, asphalt path, building and infrastructure.


YU-CB10S

1/2" Air Concrete Breaker

Piston Dia.	35 mm
Piston Stroke	150 mm
Blows Per Minute	1300 B.P.M.
Overall Length	753 mm
Air Hose	1/2"
Shank Size	26 mm
Air Consumption	35 CFM
Net Weight	14.1 kgs
*PACKING	1Sets/CTN/14ks/15.6kg/0.7'

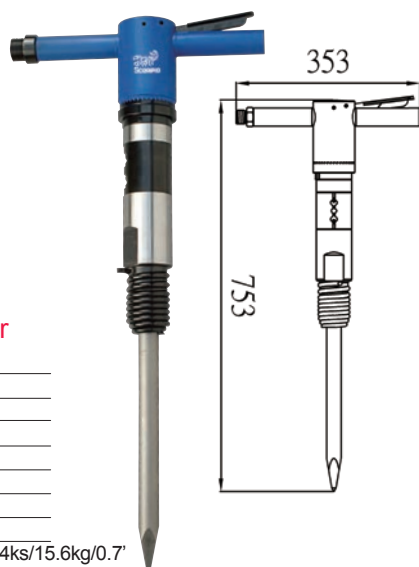


Clutch Type Handle

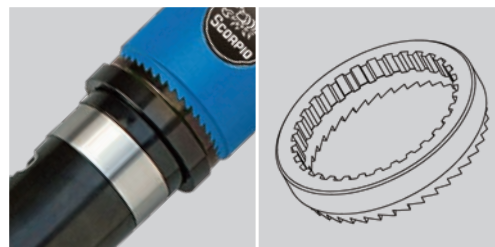

YU-CB30S

3/4" Air Concrete Breaker

Piston Dia.	40 mm
Piston Stroke	235 mm
Blows Per Minute	1000 B.P.M.
Overall Length	880 mm
Air Hose	3/4"
Shank Size	30 mm
Air Consumption	42 CFM
Net Weight	24.6 kgs
*PACKING	1Sets/CTN/24.6kg/26.5kg/0.9'

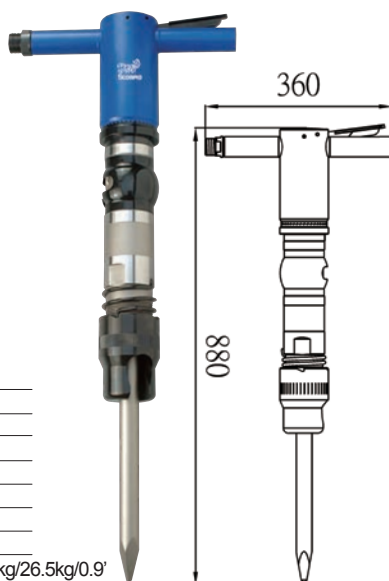

Accessories



Unique nut for
YU-CB10S & YU-CB30S


HN-10S 1/2" Hose Nipple
HN-30S 3/4" Hose Nipple




R-30S Hitch Cutter
Retainer for YU-CB30S

R-10S Beehive Retainer
Springs for YU-CB10S

Concrete Breaker Chisel Sets

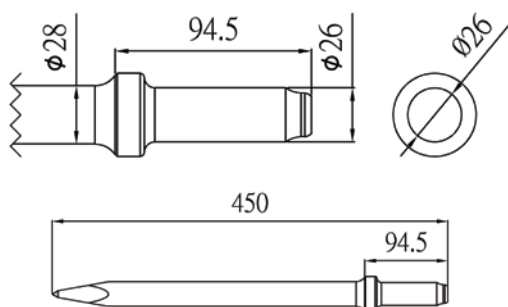

YU-CB10S

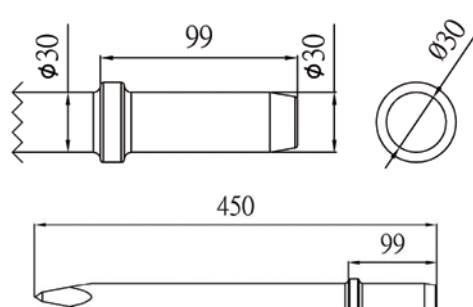

YU-CB30S



YU-RVN02

M10 Air Hydraulic Rivet Nut Tools

Rivet Nut Capacity	M4,M5,M6,M8,M10
Traction Power	2,680 lbs(1219kgs)
Stroke Length	13.7mm
Air Inlet	1/4"
Air Hose	3/8"
Air Consumption	3 CFM
Net Weight	1.63kgs
*PACKING	10/CTN/18.5kg/19.5kg/2.45'

CE

[illegible]

YU-RV101**3/16" Air Hydraulic Riveter**

Rivet Capacity	For setting blind rivets up to 3/16" (4.8mm)
Traction Power	2680 lbs (1219 kg)
Tools Stroke	14 mm
Air Pressure	90 PSI
Nosepieces	2.4mm , 3.2mm, 4.0mm, 4.8mm
Net Weight	1.5kg
*PACKING	10PCS/CTN/18kg/19kg/1.85'

**YU-RV101K****3/16" Air Hydraulic Riveter Kit**

Contents:

1pc 3/16" Air riveter	1pc Jaw Case, Front	1pc Nut, Frame Cap
10pcs Rivets 3/16"	1pc Jaw	1pc O Ring(P12)
10pcs Rivets 5/32"	1pc Jaw Pusher	1pc Spring, Valve
10pcs Rivets 1/8"	1pc Jaw Case, Rear	1pc Collar, Valve
10pcs Rivets 3/32"	1pc Spring, Jaw Pusher	1pc O Ring(AS568-147)
1pc Oiler	4pcs O Ring(P12)	1pc Piston Ring
1pc Joint nut	2pcs Backup Ring(P12)	1pc O Ring(P6)
1pc Swivel joint	1pc O Ring(P22A)	1pc Spring, Valve
1pc Nosepiece, 3/16"	1pc Backup Ring(P22A)	1pc O Ring(P7)
1pc Nosepiece, 5/32"	1pc Spring	1pc Spanner Gauge
1pc Nosepiece, 1/8"	1pc O Ring(S28)	1pc Spanner
1pc Nosepiece, 3/32"	1pc Safety Cap	

*PACKING: 6SETS/CTN/16kgs/17kgs/1.8'

**YU-RV101Q****3/16" Air Hydraulic Riveter**

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	2680 lbs (1219 kg)
Tools Stroke	14mm
Air Pressure	90 PSI
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm
Net Weight	1.5kg
*PACKING	10PCS/CTN/18kg/19kg/1.85'

**YU-RV105L****3/16" Air Hydraulic Riveter******Special for 4.8 Stainless Rivets**

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	2680 lbs (1219 kg)
Tools Stroke	18mm
Air Pressure	90 PSI
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm
Net Weight	1.5kg
*PACKING	10PCS/CTN/18.5kg/19.5kg/2.45'

**YU-RV201****3/16" Air Hydraulic Riveter**

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	2508 lbs (1140 kg)
Tools Stroke	16mm
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm
Rivet material	Aluminum, Steel, Stainless steel
Working Pressure	60-100 PSI (depend on rivet material)
Net Weight	1.45kg
*PACKING	10PCS/CTN/19kg/20kg/2.5'

**YU-RV203****3/16" Heavy Duty Air Riveter**

Rivet Capacity	1/8"~3/16" (3.2mm-4.8mm)
Traction power	1960 lbs (890 kgs)
Tools Stroke	15.5 mm
Air Pressure	90 PSI
Nosepieces	3.2 mm, 4.0 mm, 4.8 mm
Net weight	1.7 kg
*PACKING	10pcs/CTN/20.3kgs/21.3kgs/2.58'

**1/4" Air Hydraulic Riveter****YU-RV103****1/4" Heavy Duty
Air Hydraulic Riveter**

Rivet Capacity	For setting blind rivets up to 1/4"(6.4mm)
Traction Power	4166 lbs (1894kg)
Tools Stroke	16mm
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm, 5.6mm, 6.4mm
Rivet material	Aluminum, Steel, Stainless steel
Working Pressure	80-100 PSI (depend on rivet material)
Net Weight	2kg
*PACKING	6PCS/CTN/16kg/17kg/2'

**YU-RV104****1/4" Heavy Duty
Air Hydraulic Riveter**

Rivet Capacity	5/32"~1/4" (4.0mm-6.4mm)
Traction power	3130 lbs(1420 kgs)
Tools Stroke	18 mm
Air Pressure	90PSI
Nosepieces	4.0mm, 4.8mm, 6.4mm
Net Weight	2 kgs
*PACKING	8pcs/CTN/19kgs/20kgs/2.28'



YU-RV101S

3/16" Air Hydraulic Riveter w/Vacuum

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	2680 lbs (1219 kg)
Tools Stroke	14mm
Air Pressure	90 PSI
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm
Net Weight	1.5kg
*PACKING	4PCS/CTN/7.9kg/8.9kg/1.04'



YU-RV204

3/16" Heavy Duty Vacuum Air Riveter

Rivet Capacity	3/32"~3/16" (2.4mm-4.8mm) in all material
Traction power	2400 lbs (1090 kgs)
Tools Stroke	19.5 mm
Air Pressure	90PSI
Nosepieces	2.4mm,3.2mm,4.0mm,4.8mm
Net weight	1.87 kgs
*PACKING	10pcs/CTN/20.3kgs/21.3kgs/2.58'



YU-RV205

3/16" Heavy Duty Vacuum Air Riveter

Rivet Capacity	3/32"~3/16" (2.4mm-4.8mm) in all material
Traction power	2000 lbs (908 kgs)
Tools Stroke	23.5 mm
Air Pressure	95PSI
Nosepieces	2.4mm,3.2mm,4.0mm,4.8mm
Net Weight	1.55 kgs
*PACKING	Blow case



YU-RV206

3/16" Heavy Duty Vacuum Air Riveter

Rivet Capacity	3/32"~3/16" (2.4mm-4.8mm) in all material
Traction power	2000 lbs (908 kgs)
Tools Stroke	15 mm
Air Pressure	95PSI
Nosepieces	2.4mm,3.2mm,4.0mm,4.8mm
Net Weight	1.48 kgs
*PACKING	Blow case



YU-RV208

3/16" Industrial Air-Hydraulic Vacuum Riveter

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	1346 lbs (612 kg)
Tools Stroke	14mm
Air Pressure	90 PSI
Nosepieces	3.2mm, 4.0mm, 4.8mm
Net Weight	3.74kg
*PACKING	3PCS/CTN/6.6kg/7.6kg/2.1'



YU-RV209

3/16" Industrial Air-Hydraulic Vacuum Riveter

Rivet Capacity	For setting blind rivets up to 3/16"(4.8mm)
Traction Power	2097 lbs (953 kg)
Tools Stroke	17mm
Air Pressure	90 PSI
Nosepieces	3.2mm, 4.0mm, 4.8mm
Net Weight	4.62kg
*PACKING	3PCS/CTN/7.4kg/8.4kg/2.1'



3/16" Air Hydraulic Vacuum Riveter

YU-RV103S

1/4" Air Hydraulic Vacuum Riveter

Rivet Capacity	For setting blind rivets up to 1/4"(6.4mm)
Traction Power	4166 lbs (1894 kg)
Tools Stroke	19mm
Nosepieces	2.4mm, 3.2mm, 4.0mm, 4.8mm, 5.6mm, 6.4mm
Net Weight	1.5kg
*PACKING	4PCS/CTN/7.9kg/8.9kg/1.04'



YU-RV106

1/4" Heavy Duty Hydraulic Vacuum Air Riveter

Rivet Capacity	3/16"~5/16" (4.8mm-7.8mm) in all material
Traction power	3800 lbs(1723 kgs)
Tools Stroke	22.5 mm
Air Pressure	95PSI
Nosepieces	4.8mm,5.6mm,6.4mm,7.8mm
Net Weight	1.8 kgs
*PACKING	Blow case



YU-RV108P

1/4" Industrial Air Hydraulic Vacuum Riveter

Rivet Capacity	For setting blind rivets up to 1/4"(6.4mm)
Traction Power	2895 lbs (1316 kg)
Tools Stroke	26mm
Air Pressure	90 PSI
Nosepieces	4.0mm, 4.8mm, 6.4mm
Net Weight	5.06kg
*PACKING	3PCS/CTN/8.3kg/9.3kg/2.1'



YU-SG001 HVLP Gravity Flow Cup Spray Gun

Spray Dist. mm	Nozzle Size mm	Pattern Width mm	Air con. l/min	Cup Cap. cc	Paint con. l/mm	Fluiet Inlet	Packing
200	1.0	280	340	600	125	3/8" G	20PCS/CTN/ 13.3KG/18.6KG/ 3.41 cuft
	1.3	300	340	600	170	3/8" G	
	1.5	300	340	600	200	3/8" G	
	1.8	320	340	600	240	3/8" G	
	2.0	320	340	600	280	3/8" G	

YU-SG002

Type	Nozzle Size mm	Fluid Output cc/min	Pattern Width mm	Air con. l/min	Cup Cap. cc	Air Inlet inch	Fluiet Inlet	Working Pressure Psi	Gun Weight kg	Packing
Gravity	1.3	190	265	190	600	1/4"	M16x1.5P	30-45	0.62	10PCS/CTN
	1.4	210	270	190	600	1/4"	M16x1.5P	30-45	0.62	
	1.5	250	270	190	600	1/4"	M16x1.5P	30-45	0.62	
	1.7	300	275	190	600	1/4"	M16x1.5P	30-45	0.62	
	2.0	350	280	190	600	1/4"	M16x1.5P	30-45	0.62	
	2.5	400	280	190	600	1/4"	M16x1.5P	30-45	0.62	

YU-SG003 HVLP

Type	Nozzle Size mm	Fluid Output cc/min	Pattern Width mm	Air con. l/min	Cup Cap. cc	Air Inlet inch	Fluiet Inlet	Working Pressure Psi	Gun Weight kg	Packing
Gravity	1.3	135	300	250	600	1/4"	M16x1.5P	15-28	0.62	10PCS/CTN
	1.4	145	300	250	600	1/4"	M16x1.5P	15-28	0.62	
	1.5	170	310	250	600	1/4"	M16x1.5P	15-28	0.62	
	1.7	190	310	250	600	1/4"	M16x1.5P	15-28	0.62	
	2.0	200	320	250	600	1/4"	M16x1.5P	15-28	0.62	
	2.5	280	330	250	600	1/4"	M16x1.5P	15-28	0.62	

YU-SG004

Operating Dist. Cm	Nozzle Size mm	Fluid Output cc/min	Pattern Width mm	Air con. l/min	Cup Cap. cc	Air Inlet inch	Fluiet Inlet	Working Pressure Psi	Gun Weight kg	Packing
18-23	1.3	170	280	280	600	1/4"	M16x1.5P	15-35	0.45	10PCS/CTN
	1.4	180	285	280	600	1/4"	M16x1.5P	15-35	0.45	
	1.7	220	290	280	600	1/4"	M16x1.5P	15-35	0.45	
	1.9	250	300	280	600	1/4"	M16x1.5P	15-35	0.45	
	2.1	280	310	280	600	1/4"	M16x1.5P	15-35	0.45	
	2.5	320	320	280	600	1/4"	M16x1.5P	15-35	0.45	

YU-SG005

Type	Nozzle Size mm	Fluid Output cc/min	Pattern Width mm	Air con. l/min	Cup Cap. cc	Air Inlet inch	Fluiet Inlet	Working Pressure Psi	Gun Weight kg	Packing
Gravity	1.2	170	300	150-300	600	1/4"	M16x1.5P	15-43	0.5	10PCS/CTN
	1.3	210	305	150-300	600	1/4"	M16x1.5P	15-43	0.5	
	1.4	220	310	150-300	600	1/4"	M16x1.5P	15-43	0.5	
	1.6	260	320	150-300	600	1/4"	M16x1.5P	15-43	0.5	
	1.8	300	330	150-300	600	1/4"	M16x1.5P	15-43	0.5	
	2.0	340	340	150-300	600	1/4"	M16x1.5P	15-43	0.5	
	2.5	380	350	150-300	600	1/4"	M16x1.5P	15-43	0.5	

YU-SG006

Operating Dist. Cm	Nozzle Size mm	Fluid Output cc/min	Pattern Width mm	Air con. l/min	Cup Cap. cc	Air Inlet inch	Fluiet Inlet	Working Pressure Psi	Gun Weight kg	Packing
10	0.5	40	150	125	125	1/4"	M14x1.0P	28	0.3	10PCS/CTN
	0.8	67	165	125	125	1/4"	M14x1.0P	28	0.3	
	1.0	86	180	125	125	1/4"	M14x1.0P	28	0.3	
	1.2	140	200	125	125	1/4"	M14x1.0P	28	0.3	

YU-BG001-10**YU-BG001-27****YU-BG002-10****YU-BG002-27**

		COLOR	PORT SIZE	NOZZLE LENGTH	NOZZLE(O.D)	MAX PRESSURE
YU-BG001-10	Air Blow Gun without steel reinforced inlet	RED	1/4" (PT, NPT, G)	10CM	6MM	170PSI (11.7 Bar)
YU-BG001-27		RED		27CM	6MM	
YU-BG002-10	Air Blow Gun with steel reinforced inlet	BLUE		10CM	8MM	
YU-BG002-27		BLUE		27CM	8MM	
YU-BG002-50		BLUE		50CM	8MM	

Features:

1. Two models with and without steel reinforced inlet.
2. Light weight and easy operation
3. Body Material: POM

Other Style:

YU-BG002A-10	YU-BG002A-12	YU-BG002A-14	YU-BG002A-15	YU-BG002A-17
Universal Inflating Gun For Bicycles(OSHA)	Low Noise Level Air Blow Gun(OSHA)	Safety Air Blow Gun (OSHA)	Rubber Nozzle Air Blow Gun	90° Angle Nozzle Air Blow Gun(OSHA)

YU-OG500CS

Air Grease Gun Continuous Flow (Capacity 400 c.c.)




Weight	1.55 kgs
*PACKING	10 PCS/CTN/15.5 kgs/18.3 kgs /1.8'

Specification:

1. Continuously pumps grease while trigger is depressed.
2. Pressure Range: Air supplied input 60 ~ 150 psi / output 2,400 ~ 6,000 psi
3. Working Pressure: Recommend air supplied input 90 psi / output 3,600 psi
4. Loading Way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
5. Capacity: 14 oz. / 400c.c.
6. Standard Accessory: Metallic Bend Spout. "

YU-OG508CS

360° Angle-Free Rotating & Continuous Flow (Capacity 400 c.c.)

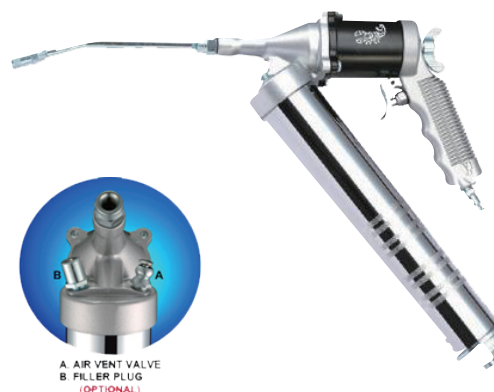

Weight	1.63 kgs
*PACKING	10 PCS/CTN/16.3kgs/18.6 kgs/1.9'

Specification:

1. Special "Grip handle" designs for allowing it to do Angle-Free Rotating.
2. Continuously pumps grease while trigger is depressed.
3. Pressure Range: Air supplied input 60 ~ 150 psi / output 2,400 ~ 6,000 psi
4. Working Pressure: Recommend air supplied input 90 psi / output 3,600 psi
5. Loading Way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
6. Capacity: 14 oz. / 400c.c.
7. Standard Accessory: Metallic Bend Spout.

Air Caulking Gun**YU-CG001**

Air Caulking Gun (Steel)

Cartridge Size	2"x8-1/2" in. (50x125mm)
Net Weight	2.47lbs (1.12kg)
Overall Length	12-3/5 in. (320mm)
Recommended Air Pressure	30psi
*PACKING	



Caulking glue not included

YU-CG002

Air Caulking Gun (Steel)

Cartridge Size	210x50mm, 220x50mm, 230x50mm
Net Weight	0.99lbs (0.45kg)
Overall Length	248mm
Recommended Air Pressure	30psi
*PACKING	20PCS/CTN/12KGS/13KGS/3.7'

YU-AF002

3 Function Tire Gauge

- Rubber Hose & Clip (360 Degree swivel function)

Material	Aluminum
Air inlet	1/4"
Pressure	90 PSI
Air Flow	1.54 CFM at 100 PSI
Packing	1 Set/sliding Card 12 Sets/CTN/8.3kg/10kg/2.4'



YU-AF003

Digital Tire Inflator

- Rubber Hose & Clip (360 Degree swivel function)
- Gauge 360 Degree Swivel Function.
- Gauge: Large LCD Display , Backlight Support

Material	Aluminum
Scale	250PSI (17 Bar/1700 Kpa)
Display Resolution	+/-2% at 25°C
Supply Voltage	1.5V*2 (#4 battery)
Air inlet	1/4"
Pressure	90 PSI
Air Flow	1.54 CFM at 100 PSI
Packing	1 Set/sliding Card 12 Sets/CTN/7.6kg/9kg/2.4'




YU-AF004

3 Function Tire Inflator

- Measure precisely the tire pressure.
- Release unnecessary pressure
- Hose Swivel Connects the tire maneuverability.
- Inflate the air into tire.

Port Size	1/4"
Max. Pressure	200PSI / 14Bar / 1.64Mpa
Temperature	-20°C ~ +80°C
Nozzle Length	30cm
Pressure Gauge	2"



YU-AF005

3 Function Tire Inflator

- Measure precisely the tire pressure.
- Release unnecessary pressure.
- Hose Swivel Connects the tire maneuverability.
- Inflate the air into tire.

Port Size	1/4"
Max. Pressure	200PSI / 14Bar / 1.64Mpa
Temperature	-20°C ~ +80°C
Nozzle Length	85cm
Pressure Gauge	2.5"



YU-AF006

3 Function Tire Inflator

- Measure precisely the tire pressure.
- Release unnecessary pressure
- Hose Swivel Connects the tire maneuverability.
- Inflate the air into tire.

Port Size	1/4"
Max. Pressure	200PSI / 14Bar / 1.64Mpa
Temperature	-20°C ~ +80°C
Nozzle Length	85cm
Pressure Gauge	2"



YU-AF007

Digital 3 Function Tire Inflator

- Easy to use
- Large easy to read LCD display
- PSI, Bar and Kpa-3 kinds of measurement range

Material	Aluminum
Scale	200PSI (13.8Bar/1.38Mpa)
Display Resolution	+/-2% FS +/- 1 digit
Air inlet	1/4"
Hose Length	30CM
Supply Voltage	DC 3V (CR2032)
Temperature	-5°C ~ 50°C (14~122 F)
Max. Pressure	232PSI / 16Bar / 1.6Mpa
Weight	0.47kg



YU-AF008

Digital 3 Function Tire Inflator

- Easy to use
- Large easy to read LCD display
- PSI, Bar and Kpa-3 kinds of measurement range

Material	Aluminum
Scale	200PSI (13.8Bar/1.38Mpa)
Display Resolution	+/-2% FS +/- 1 digit
Air inlet	1/4"
Hose Length	85CM
Supply Voltage	DC 3V (CR2032)
Temperature	-5°C ~ 50°C (14~122 F)
Max. Pressure	232PSI / 16Bar / 1.6Mpa
Weight	0.68kg




Dr. Impact Torque Extension Bar(CR-MO)

Item No.	Specification	
	Ft-lb	Nm
YU-TB4EQ65F	65	90
YU-TB4EQ75F	75	100
YU-TB4EQ80F	80	110
YU-TB4EQ90F	90	120
YU-TB4EQ100F	100	135
YU-TB4EQ110F	110	150
YU-TB4EQ120F	120	160
YU-TB4EQ130F	130	175
YU-TB4EQ140F	140	190
YU-TB4EQ150F	150	200



Dr. Impact Hold Extension Bar(CR-MO)

Item No.	Specification	
	Ft-lb	Nm
YU-TB4EHQ65F	65	90
YU-TB4EHQ75F	75	100
YU-TB4EHQ80F	80	110
YU-TB4EHQ90F	90	120
YU-TB4EHQ100F	100	135
YU-TB4EHQ110F	110	150
YU-TB4EHQ120F	120	160
YU-TB4EHQ140F	140	190



Air Insulated Torque Wrench

Anti Electric-Shock



Handle insulation meets all requirement of the VDE standard relevant international standards (IEC 60900)



YU-INS25

3/8" Insulated Torque Wrench - Slip Type



Capacity	5-25Nm
Direction & Accuracy	C.W. $\pm 6\%$ / C.C.W. $\pm 6\%$
Overall Length	269MM
Net Weight	0.7 KG
Packing	12 PCS/11.9 KG/12.5 KG/0.97'

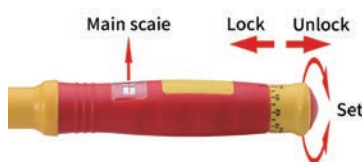

YU-INS30

3/8" Insulated Torque Wrench - Clip Type

Capacity	6-30Nm
Direction & Accuracy	C.W. $\pm 4\%$
Overall Length	299MM
Net Weight	0.72 KG
Packing	12 PCS/12.7 KG/13.3 KG/1'

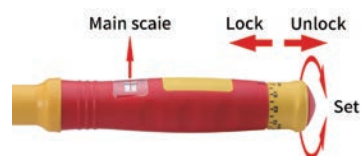

YU-INS60

3/8" Insulated Torque Wrench - Clip Type


Capacity	10-60Nm
Direction & Accuracy	C.W. $\pm 4\%$
Overall Length	350.6MM
Net Weight	0.85 KG
Packing	12 PCS/15.4 KG/16 KG/1'

YU-INS100

3/8" Insulated Torque Wrench - Clip Type

Capacity	20-100Nm
Direction & Accuracy	C.W. $\pm 4\%$
Overall Length	401MM
Net Weight	1.05 KG
Packing	12 PCS/16.9 KG/17.5 KG/1.5'

Tone Control Torques Wrench

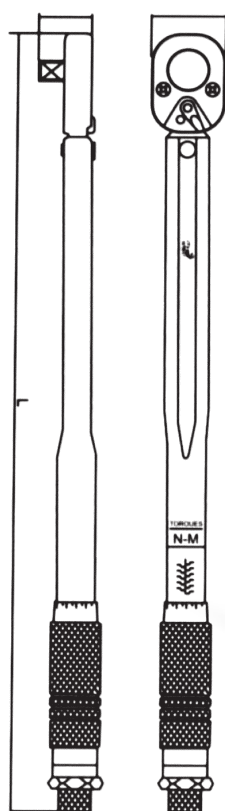

YU-T60

YU-T80

YU-T150

YU-T250

YU-T300

YU-T500

YU-T700

ITEM NO.	DRIVER	CAPACITY		L(mm)	kg	PACKING
YU-T60	1/4"or3/8"	5-25	Nm	280	0.56	20Pcs/Ctn
YU-T80	3/8"	20-110	Nm	366	0.84	20Pcs/Ctn
YU-T150	1/2"	42-210	Nm	470	1.34	12Pcs/Ctn
YU-T250	1/2"	70-350	Nm	633	2.38	6 Pcs/Ctn
YU-T300	3/4"	65-450	Nm	850	3.68	4 Pcs/Ctn
YU-T500	3/4"	140-700	Nm	1063	5.70	2 Pcs/Ctn
YU-T700	3/4"or1"	140-980	Nm	1213	6.00	2 Pcs/Ctn
ITEM NO.	DRIVER	CAPACITY		L(mm)	kg	PACKING
YU-T60F	1/4"or3/8"	20-200	Inch.Lb	280	0.56	20Pcs/Ctn
YU-T80F	3/8"	15-80	Ft.Lb	366	0.84	20Pcs/Ctn
YU-T150F	1/2"	10-150	Ft.Lb	470	1.34	12Pcs/Ctn
YU-T250F	1/2"	25-250	Ft.Lb	633	2.38	6 Pcs/Ctn
YU-T300F	3/4"	50-300	Ft.Lb	850	3.68	4 Pcs/Ctn
YU-T600F	3/4"	100-600	Ft.Lb	1063	5.70	2 Pcs/Ctn
YU-T700F	3/4"or1"	100-700	Ft.Lb	1213	6.00	2 Pcs/Ctn



- Cost-efficient, practical and compact.
- Fast and convenient installation.
- A ball-shape damper can stop tool at a fixed height in its recover stork.

Model	Capacity (Kg)	Weight (kg)	Travel (m)	Rope option (mm)	Rope Dia (mm)
YU-SB600	0.3-0.8	0.49	1.4	Nylon/Cable	2.5
YU-SB1200	0.6-1.5	0.52	1.4	Nylon/Cable	2.5
YU-SB2000	1.0-2.0	0.53	1.4	Nylon/Cable	2.5
YU-SB3000	1.5-3.0	0.76	1.4	Cable	3.2
YU-SB5000	3.0-5.0	0.81	1.4	Cable	3.2

Model	Capacity (Kg)	Weight (kg)	Travel (m)	Rope option (mm)	Rope Dia (mm)
YU-SB-1.5K	0.5-1.5	0.73	1.3	Cable	2
YU-SB-3K	1.5-3.0	1.73	1.3	Cable	3.2
YU-SB-5K	3.0-5.0	1.82	1.3	Cable	3.2
YU-SB-7K(S)	5.0-7.0	1.85	1.3	Cable	3.2
YU-SB-9K	5.0-9.0	3.59	1.3	Cable	4
YU-SB-15K	9.0-15.0	3.61	1.3	Cable	4
YU-SB-22K	15.0-22.0	7.7	1.5	Cable	4.8
YU-SB-30K	22.0-30.0	8.3	1.5	Cable	4.8

Air Accessories – F.R.L. Combination



REGULATOR (YR)

FILTER (YF)

LUBRICATOR (YL)

F+R (YFR)

FR+L (YFRL)

F+R+L (YC)

Port Size (PT. NPT.)	1/4"		3/8"		1/2"	
Type	Model No.	Specification	Model No.	Specification	Model No.	Specification
F (Filter)	YF-892	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Drain Capacity: 80ml	YF-893	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Drain Capacity: 80ml	YF-894	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Drain Capacity: 80ml
R (Regulator)	YR-892	Max. Service Pressure: 15kg/cm ² Max. Flow: 1750 L/min	YR-893	Max. Service Pressure: 15kg/cm ² Max. Flow: 2500 L/min	YR-894	Max. Service Pressure: 15kg/cm ² Max. Flow: 3000 L/min
L (Lubricator)	YL-892	Max. Service Pressure: 15kg/cm ² Max. Flow: 1750 L/min Oil Capacity: 125ml	YL-893	Max. Service Pressure: 15kg/cm ² Max. Flow: 2500 L/min Oil Capacity: 125ml	YL-894	Max. Service Pressure: 15kg/cm ² Max. Flow: 3000 L/min Oil Capacity: 125ml
Combined (F+R)	YFR-892	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 1750 L/min Drain Capacity: 80ml	YFR-893	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 2500 L/min Drain Capacity: 80ml	YFR-894	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 3000 L/min Drain Capacity: 80ml
Combined (FR+L)	YFRL-892	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 1750 L/min Drain Capacity: 80ml Oil Capacity: 125 ml	YFRL-893	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 2500 L/min Drain Capacity: 80ml Oil Capacity: 125 ml	YFRL-894	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 3000 L/min Drain Capacity: 80ml Oil Capacity: 125 ml
Combined (F+R+L)	YC-892	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 1750 L/min Drain Capacity: 80ml Oil Capacity: 125 ml	YC-893	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 2500 L/min Drain Capacity: 80ml Oil Capacity: 125 ml	YC-894	Max. Service Pressure: 15kg/cm ² Filter Grade: 5μ Max. Flow: 3000 L/min Drain Capacity: 80ml Oil Capacity: 125 ml

Air Two-step Safety Coupler



YU-B6

360° Swivel Connector



YU-B6A

360° Swivel Connector
Pressure regulating type



- 360° swivel eliminates hose twist and improve tool handling.
- Long lifetime, swivel test: more than 400,000 times.
- Bearable pressure, max. 120 PSI

F-10A

1/4" Water Separator



*Packing: 1 PC/Sliding card or buck packing

YU-B3

1/4" Inline Mini Oiler



*Packing: 1 PC/Sliding card or buck packing


YU-S50

Silencing hose
Size: 55 x 500mm



*Packing: 50 PCS/CTN/8.3 kgs/10 Kgs/2.4'

Sanding Pad

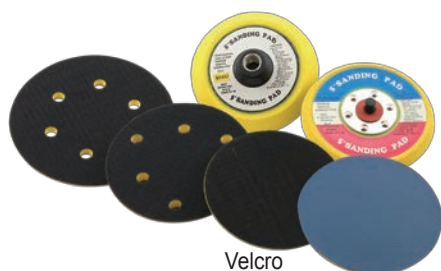

We Provided:

Sanding pad size: 2", 3", 4", 5", 6"

Material: Vinyl & Velcro available

Thread: 5/16"x24T, 5/8" x 11T, M14

PU Air Recoil Hose



Temperature: -20°C~60°C

Working Pressure

200PSI at 21°C

Air Hose Reel



Item	Hose Size (inch)	Length (FT/M)	Hose Color	Hose
YHR072550U-BD-S31	5/16"	50/15	Blue	PU braid hose
YHR070360U-BD-S13	3/8"	60/18	Blue	PU braid hose

Please contact us for more available specifications.

**S-1208DK**

8Pcs 1/2" Dr. Deep
Impact Socket Set
13,14,16,17,19,21,22,24 mm
*Packing:10set/21/22kg/0.3'

**S-1210DK**

10Pcs 1/2" Dr. Deep
Impact Socket Set
10,11,13,14,16,17,19,21,22,24 mm
*Packing:10set/26/27kg/0.4'

**S-1203DK**

3Pcs 1/2" Dr. Thin Wall
Impact Socket Set
17,19,21 mm
*Packing:20set/16/17kg/0.5'

**S-1207DK**

7Pcs 1/2" Dr. Thin Wall
Impact Socket Set
17,19,21 mm, 13/16", 7/8", 1", 1-1/16"
*Packing:10set/21/22kg/0.5'

3/8" Impact Short Sockets			3/8" Impact Long Sockets		
Model	Size-mm	Length-mm	Model	Size-mm	Length-mm
S-0908	8	30	L-0908	8	63
S-0909	9	30	L-0909	9	63
S-0910	10	30	L-0910	10	63
S-0911	11	30	L-0911	11	63
S-0912	12	30	L-0912	12	63
S-0913	13	30	L-0913	13	63
S-0914	14	30	L-0914	14	63
S-0915	15	30	L-0915	15	63
S-0916	16	30	L-0916	16	63
S-0917	17	30	L-0917	17	63
S-0918	18	30	L-0918	18	63
S-0919	19	30	L-0919	19	63
S-0920	20	30	L-0920	20	63
S-0921	21	30	L-0921	21	63

3/4" Impact Short Sockets			3/4" Impact Long Sockets		
Model	Size-mm	Length-mm	Model	Size-mm	Length-mm
S-1919	19	50	L-1919	19	90
S-1920	20	50	L-1920	20	90
S-1921	21	50	L-1921	21	90
S-1922	22	50	L-1922	22	90
S-1923	23	50	L-1923	23	90
S-1924	24	50	L-1924	24	90
S-1925	25	50	L-1925	25	90
S-1926	26	50	L-1926	26	90
S-1927	27	53	L-1927	27	90
S-1928	28	53	L-1928	28	90
S-1929	29	53	L-1929	29	90
S-1930	30	53	L-1930	30	90
S-1932	32	56	L-1932	32	90
S-1933	33	56	L-1933	33	90
S-1934	34	56	L-1934	34	90
S-1935	35	56	L-1935	35	90
S-1936	36	56	L-1936	36	90
S-1937	37	57	L-1937	37	90
S-1938	38	57	L-1938	38	90
S-1941	41	57	L-1941	41	90
S-1942	42	57	L-1942	42	90
S-1943	43	57	L-1943	43	90
S-1946	46	62	L-1946	46	90
S-1948	48	70	L-1948	48	90
S-1950	50	72	L-1950	50	90

1/2" Impact Short Sockets			1/2" Impact Long Sockets		
Model	Size-mm	Length-mm	Model	Size-mm	Length-mm
S-1208	8	39	L-1208	8	78
S-1209	9	39	L-1209	9	78
S-1210	10	39	L-1210	10	78
S-1211	11	39	L-1211	11	78
S-1212	12	39	L-1212	12	78
S-1213	13	39	L-1213	13	78
S-1214	14	39	L-1214	14	78
S-1215	15	39	L-1215	15	78
S-1216	16	39	L-1216	16	78
S-1217	17	39	L-1217	17	78
S-1218	18	39	L-1218	18	78
S-1219	19	39	L-1219	19	78
S-1220	20	39	L-1220	20	78
S-1221	21	39	L-1221	21	78
S-1222	22	39	L-1222	22	78
S-1223	23	39	S-1223	23	78
S-1224	24	39	S-1224	24	78
S-1225	25	39	S-1225	25	78
S-1226	26	39	S-1226	26	78
S-1227	27	43	S-1227	27	78

1" Impact Short Sockets			1" Impact Long Sockets		
Model	Size-mm	Length-mm	Model	Size-mm	Length-mm
S-2521	21	58	L-2521	21	90
S-2522	22	58	L-2522	22	90
S-2523	23	58	L-2523	23	90
S-2524	24	58	L-2524	24	90
S-2525	25	58	L-2525	25	90
S-2526	26	58	L-2526	26	90
S-2527	27	58	L-2527	27	90
S-2528	28	58	L-2528	28	90
S-2529	29	60	L-2529	29	90
S-2530	30	60	L-2530	30	90
S-2532	32	61	L-2532	32	90
S-2533	33	61	L-2533	33	90
S-2534	34	61	L-2534	34	90
S-2535	35	61	L-2535	35	90
S-2536	36	65	L-2536	36	90
S-2537	37	65	L-2537	37	90
S-2538	38	65	L-2538	38	90
S-2541	41	65	L-2541	41	90
S-2542	42	74	L-2542	42	90
S-2543	43	74	L-2543	43	90
S-2546	46	74	L-2546	46	100
S-2548	48	74	L-2548	48	100
S-2550	50	74	L-2550	50	100


Hydraulic Torque Tester

Economical & Easy

With simple design, SK series hydraulic torque tester is applicable to measure tools' torque output, such as impact wrench, ratchet wrench, screwdriver and others in air or electricity drive. The readout in the dial indicator is comparative degree of power of the tested tool rather than absolute torque value. The torque value has to be converted by torque wrench.

How to get the exact torque value of the tested tool?

When the tested tool completes the test at the specific time, the pressure gauge (C) will show its performed pressure (PSI, kg/cm²). Then insert the square drive head of torque wrench (B) into the socket of the torque tester (A). Slowly rotate the torque wrench clockwise until the pressure gauge needle reaches the previous performed pressure (PSI, kg/cm²). At this moment the value displays on the torque wrench is exact torque of the tested tool.

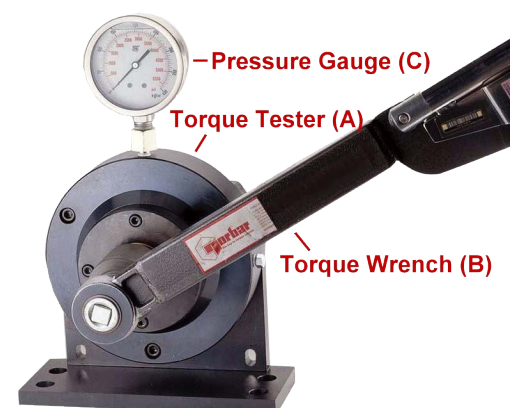

Application:

MODEL	Square Drive	KG-M	FT-LB	N-m	N.W.(kg)	G.W.(kg)	CUFT
YU-SK06	3/8"	0-17	0-120	0-163	13.2	20	1.2
YU-SK09	3/8"	0-32	0-230	0-312	13.2	20	1.2
YU-SK12	1/2"	0-69	0-500	0-678	31.7	40	1.8
YU-SK19	3/4"	0-138	0-1000	0-1356	31.8	41	1.8
YU-SK25	1"	0-332	0-2400	0-3254	32.5	42	1.8
YU-SK38	1"	0-414	0-3000	0-4068	47	56	3.1

Electronic Torque Tester

Features:

- Applicable to detect various torque tools, such as: Impact Type, Pulse Type, Clutch Type and Torque Wrench.
- High precision, convenient and accurate measurement for torque test or torque verification
- With RS232-C interface, connectable to computer for drawing and printing with software.
- Available torque range from 0.05 to 5000 N.m.
- Sensor accuracy better than $\pm 0.3\%$ R.O.
- 3-year warranty without overloading operation, including management software and factory report

Indicator functions:


- Torque value and Blows per Minute (BPM) can be displayed at the same time.
- Settable Upper and lower limit torque values (High, Low, Pass).
- Selectable zero setting or the time to zero setting automatically.
- Testable forward and reverse torque.
- Available for 5 units selection and conversion, including imperial system, SI system and metric system (N.m, lbf.ft, lbf.in, kgf.m, kgf.cm).
- To have the measured value reach to optimal, the filtering size can be adjusted if necessary.
- Power: AC 110V ~ 240V.

Application:

MODEL	Square Drive	N.m	lbf.ft (Ft-lb)	lbf.in (In-lb)	Kgf.m	Kgf.cm
DT-100	1/4" , 3/8"	5-100	3.7-73.8	44-885	0.51-10.2	51-1020
DT-500	1/4" , 3/8"	25-500	18.5-369	221-4425	2.5-51	250-5100
DT-1000	3/8" , 1/2"	50-1000	37-738	442-8851	5.1-102	510-10200
DT-2500	1/2" , 3/4"	125-2500	92-1845		12.7-255	
DT-5000	3/4" , 1" 1-1/2"	250-5000	184-3690		25.5-510	




Typical Air Compressor or Tank Hook-Up

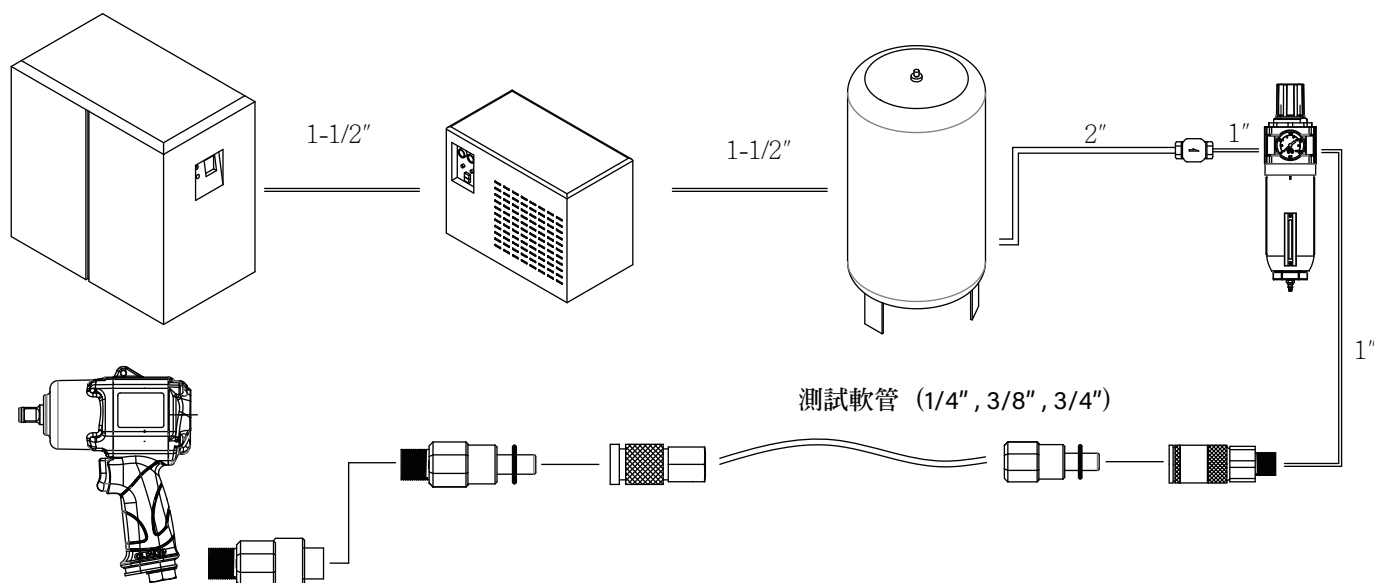

WARNING!!

While installing air compressor system, be sure to have filters separators for oil and water, regulators, and lubricators to increase work efficiency, prolong the life of air tools and reduce maintenance costs.

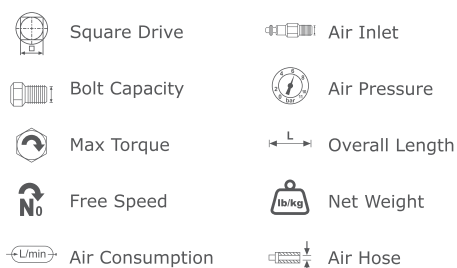

LENGTH

mm	m	inch	foot
1	0.001	0.03937	0.003281
1000	1	39.37	3.281
25.4	0.0254	1	0.08333
304.8	0.3048	12	1
1 mm=0.03937 inch		1 m=39.37 inch	
		1 inch=25.4mm	

POWER

N	kgf	lb(Pound)	
1	0.1020	0.2249	1 N=0.1020kgf
9.807	1	2.205	1 kgf=9.807N=2.205lb
4.447	0.4535	1	1 lb=0.4535kgf
(1N=1kgw/m²) 1kgw(weight) 1kgf(force)			

PRESSURE

KPa	kg/cm²	lb/inch²(P.S.I)	bar
1	1.01020	0.145	0.01
98.07	1	14.22	0.9807
6.895	0.07031	1	0.06895
100	1.0197	14.50	1
1 Pa=1 N/m² 1 kg/m²=14.22lb/inch²			
1 KPa=1000Pa=0.01 bar 1 lb/inch²=0.07031 kgf/cm²			

TORQUE



N-m	kg-m	ft-lb
1	0.1020	0.7378
9.807	1	7.233
1.356	0.1383	1
1 N-m=0.1020kg-m 1 kg-m=7.233ft-lb		
1 N-m=0.7378ft-lb 1 ft-lb=1.356 N-m		

WEIGHT

* 1 lb=0.453592kg * 1 kg=2.20462 lb

FLOW

* 1 m³/h=16.6667 l/m=35.335 cfm
 * 1 cfm=0.471947 l/s=0.0283m³/min
 =28.32 l/min
 * 1 l/s=2.1189 cfm
 * 1 m³/h=0.277778 l/s

Items	Description	Inspection	Daily	Weekly	Remarks
1	Check the condition of air line accessories, and drain out the water from the separators and air line to keep the air supply system of air line clean and dry.		●		All Air Tools
2	Always keep the air pressure at 90 psi (6.3kg/cm ²) for maximum tool performance and take your reading while the tool is running.		●		All Air Tools
3	Use proper couplers, nipples, hoses, pipes and fittings.		●		All Air Tools
4	Check that quick change couplers are in secure connection and in good order.		●	●	All Air Tools
5	Keep tools properly lubricated to prevent wear and rust.		●	●	All Air Tools
6	When tools are not in use, clean and lubricate them, then store them in a clean and dry place.		●	●	All Air Tools
7	Always use safety goggles or a face shield when operating air tools. Never wear loose clothing that might get caught in the tool and cause injuries.		●		All Air Tools
8	While installing whip hoses or quick coupler directly into the tool, use a liquid pipe sealant to prevent damage to the housing from damage. (Do not use teflon tape)		●		All Air Tools
9	Always make sure that the impact wrench socket is properly retained to prevent injuries. Use an impact-type socket only.		●		Air Wrench
10	If an air wrench fails to loosen a bolt in five (5) seconds, use a larger wrench and apply penetrating oil before using the wrench.				Air Wrench
11	Clean and lubricate check jaws periodically to prolong concentricity.		●		Air Drill
12	To avoid the danger of breakage from high breakthrough torque is to use the properly sharpened twist drills and reamers, and select a proper drill speed.		●		Air Drill
13	Start drilling at low speed and gradually increase power. Avoid kick-back by easing up at breakthrough.		●		Air Drill



High Power
Light Weight
Lower Air Consumption
Energy Saving for Green Living World



YUEH CHI ENTERPRISE CO., LTD.

No. 90, JIFENG RD., WUFENG DIST., TAICHUNG CITY, 41348 TAIWAN

TEL: +886-4-23303579 FAX: +886-4-23304222

E-mail: sales@scorpiotool.com.tw

www.scorpiotool.com.tw



PRINTED IN SEP. 2023